


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	DATE
A		PRODUCTION RELEASE	5/19/04	TKK	5/19/04



WHERE SHOWN
6 MARK PART NUMBER AND REVISION

5 REMOVE INSULATION, SOLDERED TO LEADS


4 CONSTRUCTION: ENCAPSULATED USING BOBBIN.

- 3 SPECIFICATIONS @ 25 °C :
- FREQ. RANGE = 20 KHZ TO 200 KHZ
 - OPERATING TEMP. = - 25 °C TO 125 °C
 - HIPOT PRIMARY TO SECONDARY = 3750 Vrms
 - ONE TURN PRIMARY PEAK SENSE CURRENT = 20 A
 - PRIMARY BIPOLAR = 1800 AMPS-uSEC RATING MAX
 - PRIMARY UNIPOLAR = 900 AMPS-uSEC RATING MAX
 - SECONDARY RATED TERMINATING RESISTANCE = 300 OHMS NOMINAL
 - SECONDARY DCR = 11.0 OHMS MAX
 - SECONDARY INDUCTANCE TEST VOLTAGE @ 15.75 KHZ = 3.0 V
 - SECONDARY INDUCTANCE = 180.0 mH MIN
 - SECONDARY TURNS = 300 CT

2 WIRE: UL RECOGNIZED 130 °C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: FERRITE TOROID

BOBBIN RATING CLASS B (130 °C) REQUIRED
1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
UNIT: INCHES [MM]

NOTES: UNLESS OTHERWISE SPECIFIED, CURRENT SENSOR.

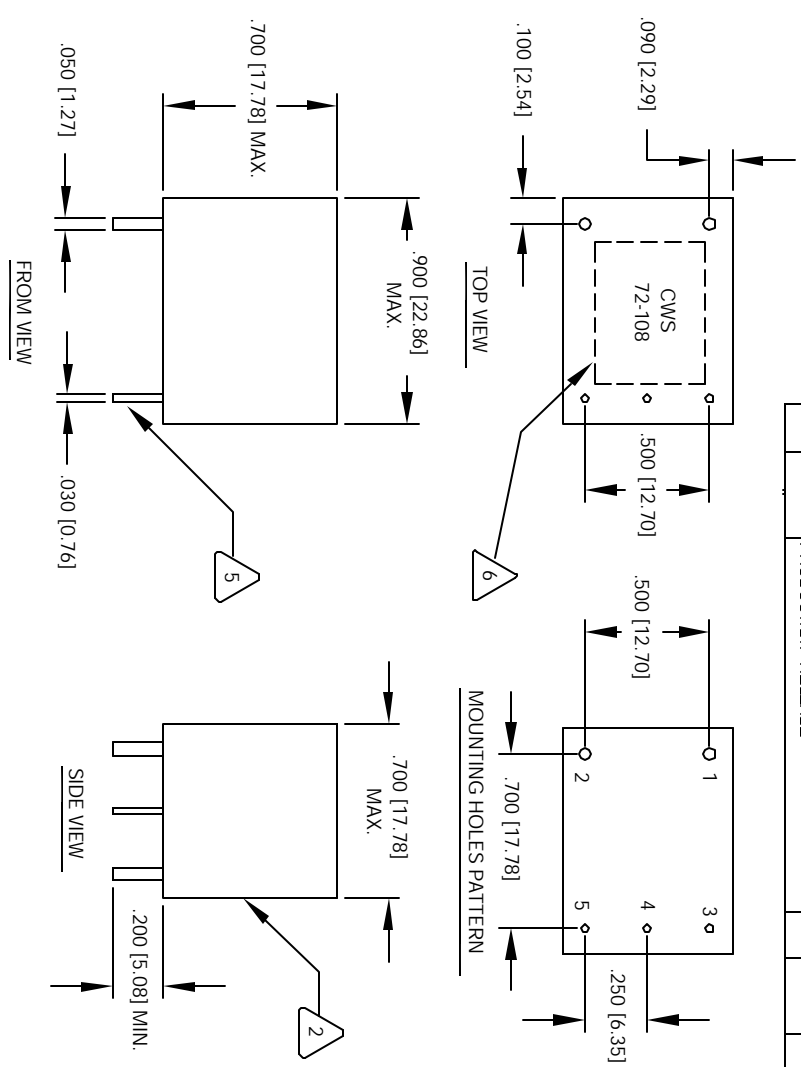

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT		PARTS LIST	
			CWS Coil Winding Specialist.	
			1510 E. Edinger Ave.	
			Unit B, Santa Ana, CA, 92705	
			TITLE: Current Sense Transformer	
			SIZE: DIM. IN. B	REV A
			SCALE: 2=1	SHEET 1 OF 1