
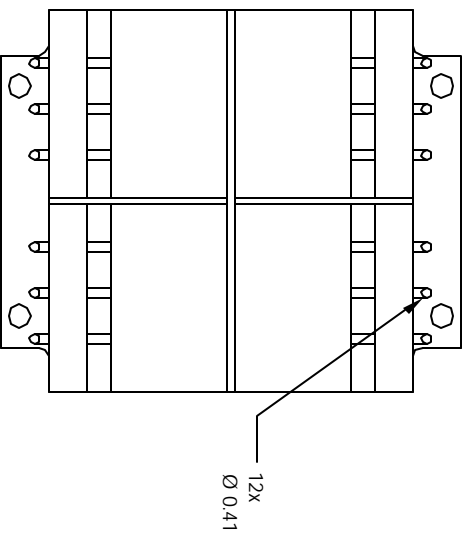
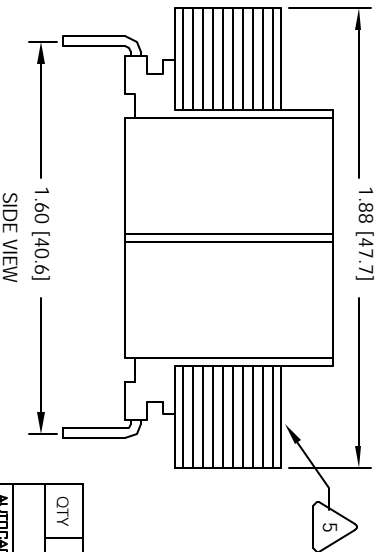
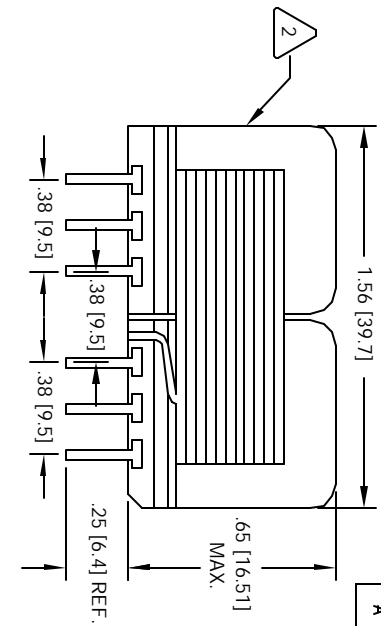


The information contained in this drawing is the sole property of CWS/Epilink and may be reproduced in part or whole without written permission of CWS/Epilink, its publisher.

REVISION HISTORY

REV	ECN	DESCRIPTION	SEEN & DATE			
A		PRODUCTION RELEASE	BY	DATE	CHK	DATE
			TKK	4/15/05	JLAW	4/15/05

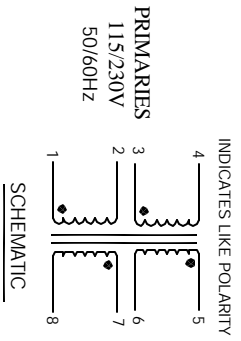

5 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION

4 CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION

3 SPECIFICATIONS @ 25°C
PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ
PARALLEL CONNECTION (5+7, 6+8) = 5V @ 500 mA
SERIES CONNECTION (6+7) = 10V C.T. @ 250 mA
SECONDARY RMS RATING :-
VOLT-AMPERES RATING = 2.5 VA

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: 50 Hz / 60 Hz LAMINATION

1 BOBBIN RATING CLASS B (130°C) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,
READ NOTES FROM BOTTOM TO TOP

UNLESS OTHERWISE SPECIFIED	
DIMENSIONING AND TOLERANCES PER ANSI Y14.1M	ALL DIMENSIONS ARE IN INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED	±.0005
3X TOLERANCES UNLESS OTHERWISE SPECIFIED	±.0010
10X TOLERANCES UNLESS OTHERWISE SPECIFIED	±.0020
30X TOLERANCES UNLESS OTHERWISE SPECIFIED	±.0040
ANGULAR DIMENSIONS	±.0010
DO NOT SCALE DRAWING	

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
	DRWN	4/15/05	CWS Coil Winding Specialist	
	BRND	4/15/05	Power Transformer	
	ENGR	4/15/05	EPL Series, 2.5VA, 0.65" High	
	APPR.	4/15/05		
SIZE (INCHES)			SCALE	REV
B			2=1	A
SHEET 1			OF 1	