
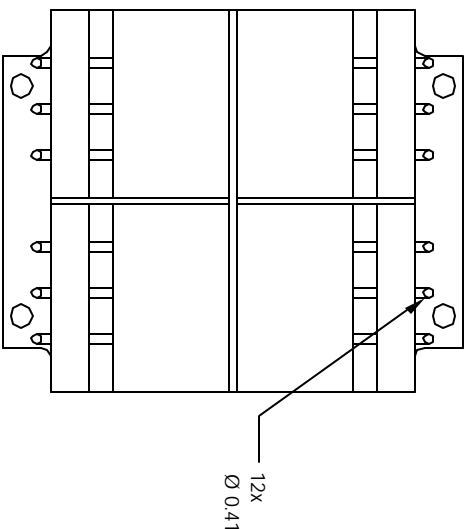
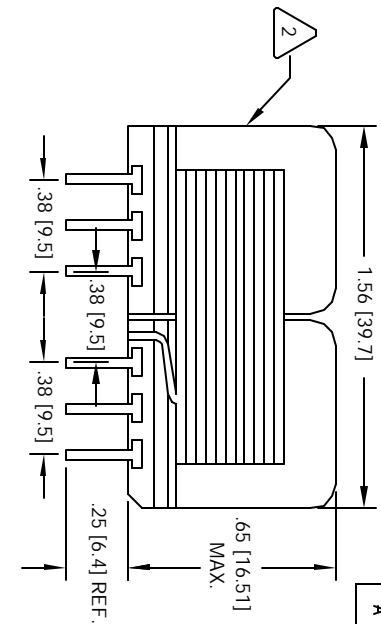


The information contained in this drawing is the sole property of CWS/Epilink and may be reproduced in part or whole without written permission of the manufacturer.


REVISION HISTORY

REV	ECN	DESCRIPTION	SENT & DATE			
			BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	4/15/05	JLJU	4/15/05

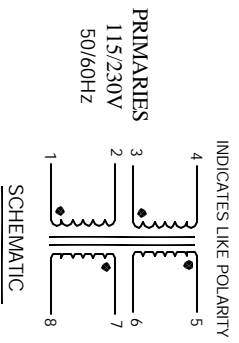

- 5 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION
- CONTRACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION
- 4 CONSTRUCTION:
- PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ
 PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ
 PARALLEL CONNECTION (5+7, 6+8) = 8V @ 300 mA
 SERIES CONNECTION (6+7) = 16V C.T. @ 150 mA
 SECONDARY RMS RATING: -
 VOLT-AMPERES RATING = 2.5 VA
- 3 SPECIFICATIONS @ 25°C
- WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
 CWS BYTE-MARK OR OTHER APPROVED PART
- 2 CORE: 50 Hz / 60 Hz LAMINATION
- BOBBIN RATING CLASS B (130°C) REQUIRED
- 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP

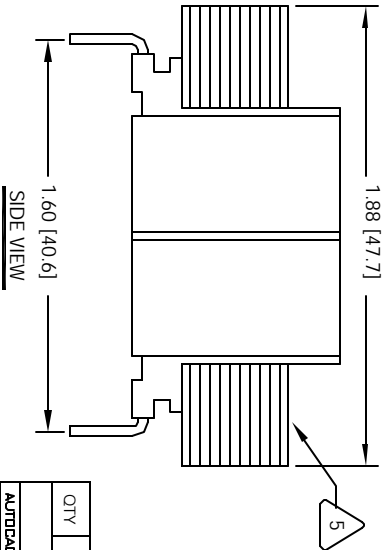

UNLESS OTHERWISE SPECIFIED
 DIMENSIONING AND TOLERANCES PER ANSI Y14.1M
 ALL DIMENSIONS ARE IN INCHES AND (PARENTHESES)
 TOLERANCES IN MILLIMETERS:
 DIMENSIONS UNLESS OTHERWISE SPECIFIED:
 FRACTIONS: ±0.005
 DECIMALS: ±0.005
 ANGLES: PRECISION ±0.005
 DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	TITLE	
	TKK	4/15/05	Power Transformer	
	BRND JLJU	4/15/05	EPL Series, 2.5VA, 0.65" High	
	ENGR KSLUM	4/16/05		
	APPR. JLJU	4/15/05		
		SCALE	SIZE (INCHES)	REV
		2=1	B	A