
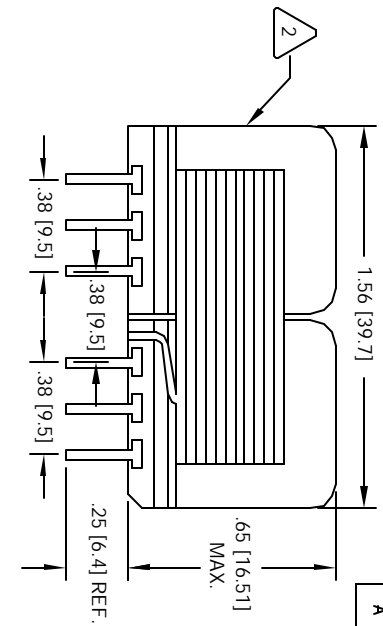



The information contained in this drawing is the sole property of CWS/Spokane and may not be used, copied, or reproduced in any form without written permission of the manufacturer.

REVISION HISTORY


REV	ECN	DESCRIPTION	SENT & DATE		
			BY	DATE	CHK
A		PRODUCTION RELEASE	TKK	4/15/05	JLJU

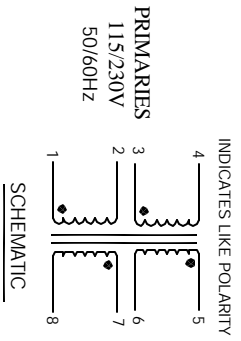

FRONT VIEW

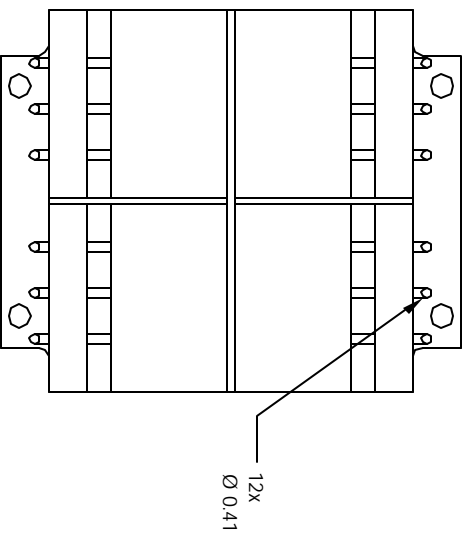

BOTTOM VIEW

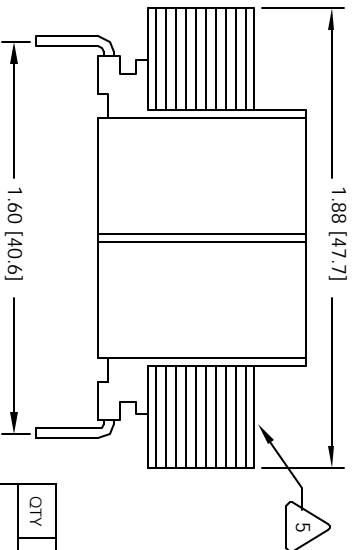

SIDE VIEW

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
	BRN1	4/15/05	<b>CWS Coil Winding Specialist</b>	
	BRN2	4/15/05	Power Transformer	
	ENGR	4/15/05	EPL Series, 2.5VA, 0.65" High	
	JLJU	4/15/05	SIZE (DIN NO.)	REV
			B	A
			SCALE	
			2=1	
			SHEET 1 OF 1	

- WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION
- CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION
- CONSTRUCTION:
  - PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ
  - PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ
  - PARALLEL CONNECTION (5+7, 6+8) = 10V @ 250 mA
  - SERIES CONNECTION (6+7) = 20V C.T. @ 125 mA
  - SECONDARY RMS RATING: -
  - VOLT-AMPERES RATING = 2.5 VA
- SPECIFICATIONS @ 25°C
  - WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
  - CWS BYTEMARK OR OTHER APPROVED PART
  - CORE: 50 Hz / 60 Hz LAMINATION
- BOBBIN RATING CLASS B (130°C) REQUIRED
- MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP