


The information contained in this drawing is the sole property of CWS/Epilink and may be reproduced in part or whole without written permission of the manufacturer.

REVISION HISTORY

REV	ECN	DESCRIPTION	SENT & DATE			
			BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	4/15/05	JLAW	4/15/05

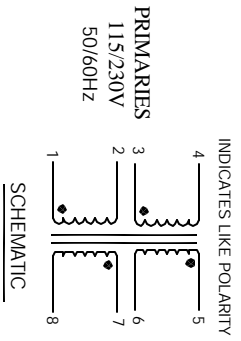

5 WHERE SHOWN, USING A PERMANENT MARKING METHOD  
MARK PART NUMBER AND REVISION




4 CONTACT CWS FOR MORE INFORMATION  
BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES  
DESIGNED TO MEET UL, CSA, TUV STANDARDS,  
CONCENTRIC CONSTRUCTION

3 SPECIFICATIONS @ 25°C  
PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ  
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ  
PARALLEL CONNECTION (5+7, 6+8) = 20V @ 120 mA  
SERIES CONNECTION (6+7) = 40V C.T. @ 60 mA  
SECONDARY RMS RATING :-  
VOLT-AMPERES RATING = 2.5 VA

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE  
CWS BYTE-MARK OR OTHER APPROVED PART  
CORE: 50 Hz / 60 Hz LAMINATION

1 BOBBIN RATING CLASS B (130°C) REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,  
READ NOTES FROM BOTTOM TO TOP

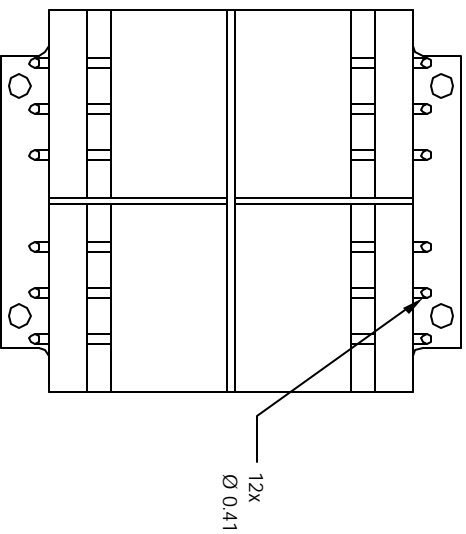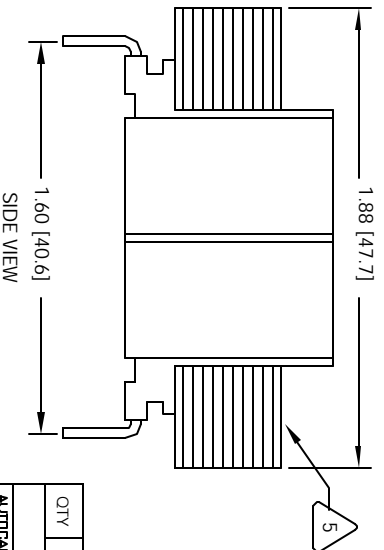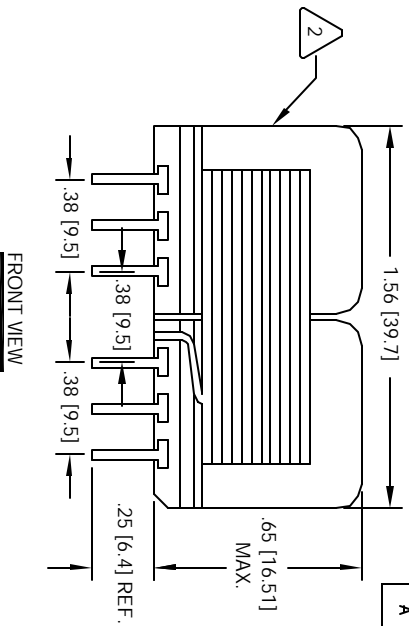

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
	BRN1 TDK	4/15/05	<b>CWS Coil Winding Specialist</b>	
	BRN2 JLAW	4/15/05	Power Transformer	
	ENGR KSLUM	4/15/05	EPL Series, 2.5VA, 0.65" High	
	APPR. JLAW	4/15/05		
TOLERANCE UNLESS OTHERWISE SPECIFIED			SIZE (DIM. IN.)	REV
DIMENSIONING AND TOLERANCE PER ANSI Y14.1M			B	A
ALL DIMENSIONS ARE IN INCHES AND (PARENTHESES)			SCALE	
TOLERANCE UNLESS OTHERWISE SPECIFIED			2=1	
DIMENSIONAL TOLERANCES				
XXX±.127 .25±.25				
ANGLE PRECISION				
DO NOT SCALE DRAWING				