
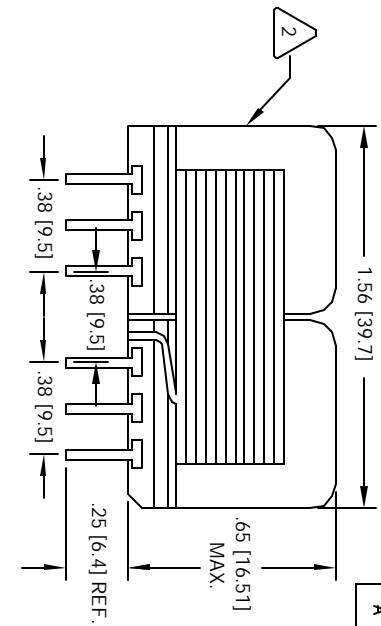



The information contained in this drawing is the sole property of CWS Specialist and may be reproduced in part or whole without written permission of CWS Specialist, Inc. prohibited.

REVISION HISTORY


REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	4/15/05	JLJU	4/15/05



FRONT VIEW

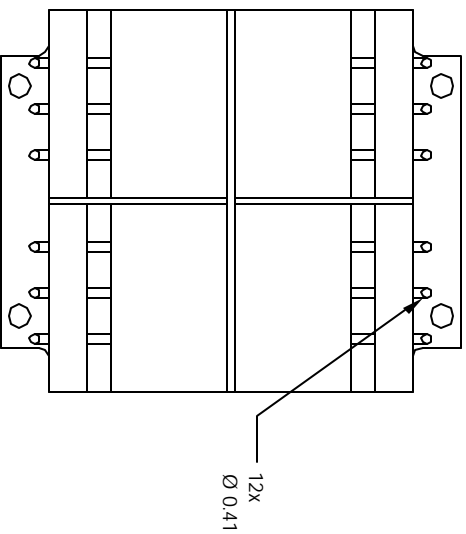

BOTTOM VIEW

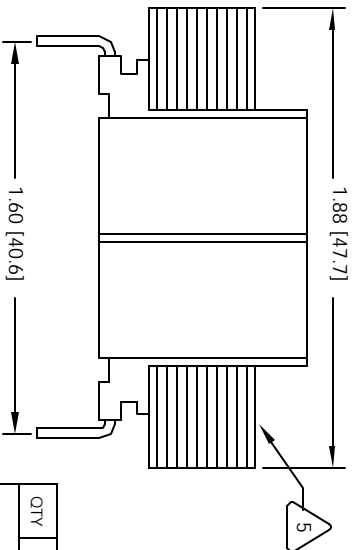

SIDE VIEW

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
	BRN1 TDK	4/15/05	CWS Coil Winding Specialist	
	BRN2 JLJU	4/15/05	Power Transformer	
	ENGR KSJUN	4/15/05	EPL Series, 2.5VA, 0.65" High	
	APPR. JLJU	4/15/05		
TOLERANCE UNITS: $\pm .0030$ $\pm .0040$ $\pm .0050$ $\pm .0075$ $\pm .0100$ $\pm .0150$ $\pm .0200$ $\pm .0300$ $\pm .0400$ $\pm .0500$ $\pm .0750$ $\pm .1000$			SIZE (INCHES)	REV
ANGLE PRECISION: $\pm 30'$ $\pm 45'$ $\pm 1'$ $\pm 2'$ $\pm 3'$ $\pm 4'$ $\pm 5'$ $\pm 10'$ $\pm 15'$ $\pm 30'$			SCALE	A
DO NOT SCALE DRAWING			2=1	

- CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION
- CONSTRUCTION:
PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ
PARALLEL CONNECTION (5+7, 6+8) = 28V @ 90 mA
SERIES CONNECTION (6+7) = 56V C.T. @ 45 mA
SECONDARY RMS RATING :-
VOLT-AMPERES RATING = 2.5 VA
- SPECIFICATIONS @ 25°C
WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
CWS BYTE-MARK OR OTHER APPROVED PART
CORE: 50 Hz / 60 Hz LAMINATION
- BOBBIN RATING CLASS B (130°C) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP