


The information contained in this drawing is the sole property of CWS/Specialist. Any reproduction in part or whole without written permission of CWS/Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKR	4/13/05	JLJU	4/13/05



5 WHERE SHOWN, USING A PERMANENT MARKING METHOD  
MARK PART NUMBER AND REVISION

CONTACT CWS FOR MORE INFORMATION  
BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES  
DESIGNED TO MEET UL, CSA, TUV STANDARDS,  
CONCENTRIC CONSTRUCTION




4 CONSTRUCTION:

PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ  
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ  
PARALLEL CONNECTION (5+7,6+8) = 20V @ 1.20 A  
SERIES CONNECTION (6+7) = 40V C.T. @ 600 mA  
SECONDARY RMS RATING:-  
VOLT-AMPERES RATING = 24 VA  
SPECIFICATIONS @ 25°C

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: 50 Hz / 60 Hz LAMINATION

BOBBIN RATING CLASS B (130°C) REQUIRED  
1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,  
READ NOTES FROM BOTTOM TO TOP

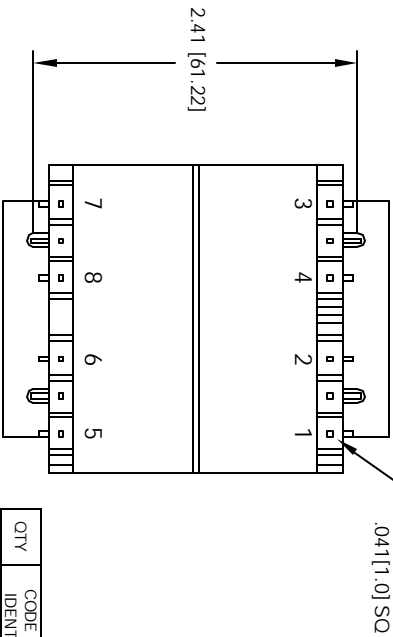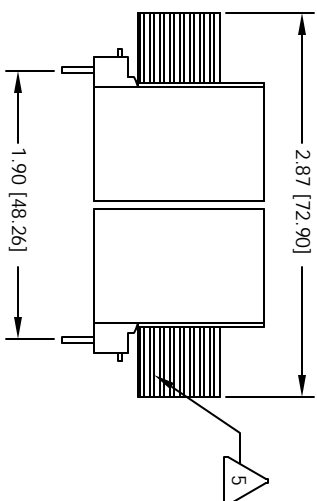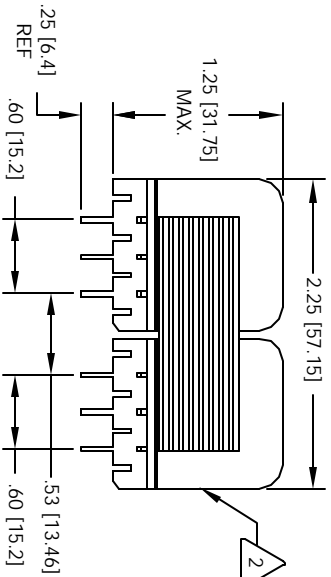

UNLESS OTHERWISE SPECIFIED
DIMENSIONS AND TOLERANCE PER ANSI Y14.4M
ALL DIMENSIONS ARE IN INCHES AND DIMENSIONS
TOLERANCE NOTCHES ±.015
TOLERANCE METRIS ±.005
ANGLE PROJECTION
DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
			<b>CWS Coil Winding Specialist</b>	
			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
			<b>DRWN</b> TKR 4/13/05	
			<b>CHKD</b> JLJU 4/15/05	
			<b>ENGR</b> K3UM 4/10/05	
			<b>APPR</b> JLJU 4/15/05	
			<b>SCALE</b> B	
			<b>SIZE</b> DMC NO.	
			<b>EPPL-24-40</b>	
			<b>REV</b> A	