


The information contained in this drawing is the sole property of CWS/Specialist. Any reproduction in part or whole without written permission of CWS/Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKR	4/13/05	JLJU	4/13/05



5 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION




4 CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION

3 PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ  
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ  
PARALLEL CONNECTION (5+7,6+8) = 28V @ 850 mA  
SERIES CONNECTION (6+7) = 56V C.T. @ 425 mA  
SECONDARY RMS RATING:-  
VOLT-AMPERES RATING = 24 VA  
SPECIFICATIONS @ 25°C

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: 50 Hz / 60 Hz LAMINATION

1 BOBBIN RATING CLASS B (130°C) REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,  
READ NOTES FROM BOTTOM TO TOP

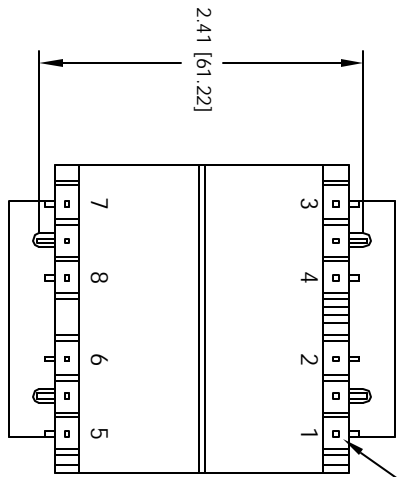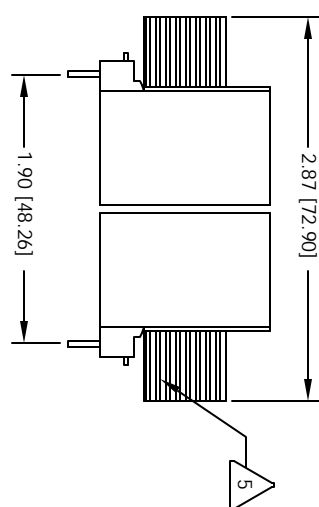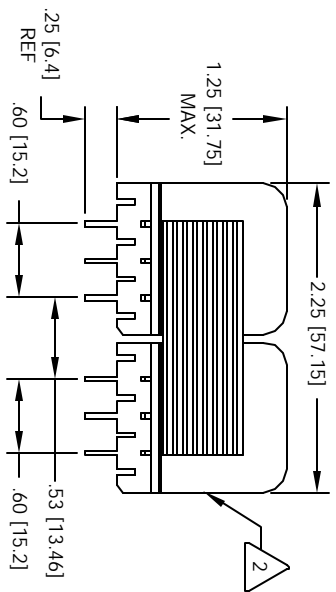

QTY	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
				<b>PARTS LIST</b>	
	AUTOCAD		X		
	SOLIDWORKS				
	SIGN			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
	DRWN	TKR	4/13/05	<b>CWS Coil Winding Specialist</b>	
	CHEN	JLJU	4/15/05	Power Transformer	
	ENGR	K3UM	4/10/05	EPL Series, 24V, 1.250" High	
	APPR	JLJU	4/15/05	SIZE [DIM. NO.]	REV
				B	A
				SCALE	
				1=1	
				SHEET	1 OF 1