


The information contained in this drawing is the sole property of CWS/EpLink. Any reproduction in part or whole without written permission of CWS/EpLink is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKR	4/13/05	JLAV	4/13/05

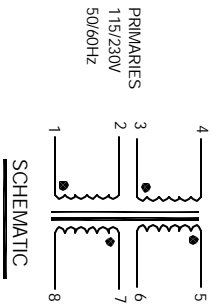

5 WHERE SHOWN, USING A PERMANENT MARKING METHOD  
MARK PART NUMBER AND REVISION

CONTACT CWS FOR MORE INFORMATION

BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES  
DESIGNED TO MEET UL, CSA, TUV STANDARDS,  
CONCENTRIC CONSTRUCTION




4 CONSTRUCTION:

PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ  
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ  
PARALLEL CONNECTION (5+7,6+8) = 12V @ 4.00 A  
SERIES CONNECTION (6+7) = 24V C.T. @ 2.00 A  
SECONDARY RMS RATING:-  
VOLT-AMPERES RATING = 48 VA  
SPECIFICATIONS @ 25°C

2 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE  
CWS BYTEMARK OR OTHER APPROVED PART  
CORE: 50 Hz / 60 Hz LAMINATION

1 BOBBIN RATING CLASS B (130°C) REQUIRED  
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,  
READ NOTES FROM BOTTOM TO TOP

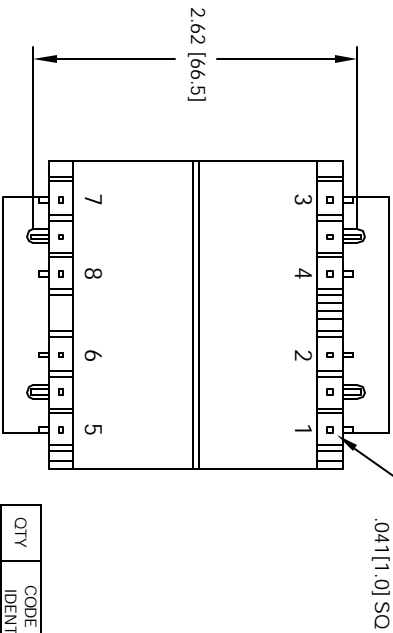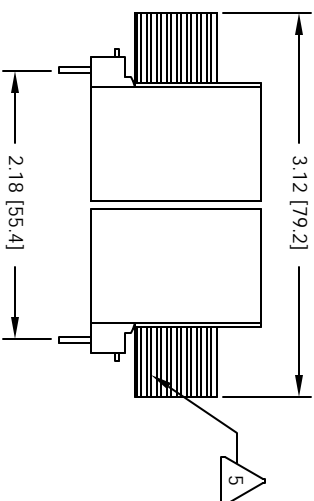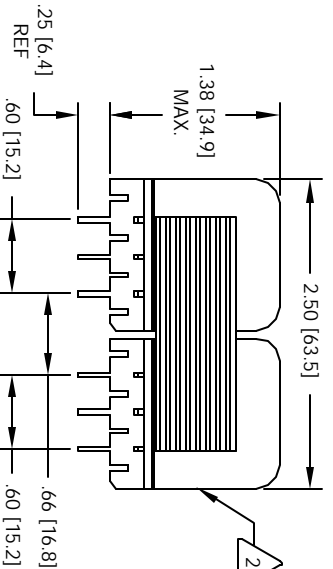

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT		PARTS LIST	
			<b>CWS Coil Winding Specialist</b>	
			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
			Power Transformer	
			EPL Series, 48V, 1.375" High	
			SIZE [DIM. NO.]	REV
			B [EPL-48-24]	A
			SCALE	
			1=1	
			SHEET 1 OF 1	