


The information contained in this drawing is the sole property of CWS/Specialist. Any reproduction in part or whole without written permission of CWS/Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKR	4/13/05	JLJU	4/13/05






5 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION

4 CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION

3 SPECIFICATIONS @ 25°C  
 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE  
 CWS BYTEMARK OR OTHER APPROVED PART  
 CORE: 50 Hz / 60 Hz LAMINATION

2 BOBBIN RATING CLASS B (130°C) REQUIRED  
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED,  
 READ NOTES FROM BOTTOM TO TOP

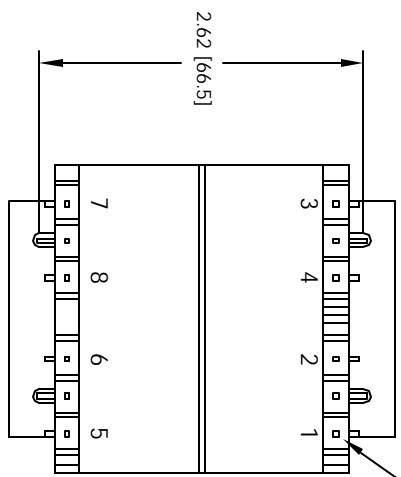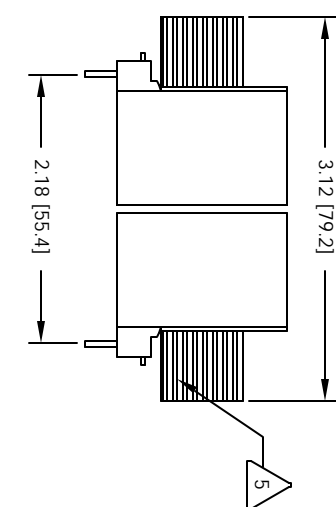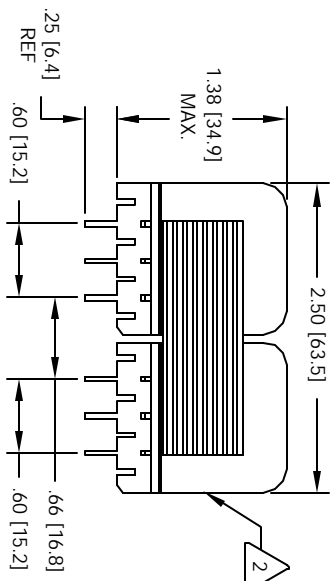

QTY	CODE	MFG. P/N	DESCRIPTION	ITEM NO.
	IDENT		PARTS LIST	
			<b>CWS Coil Winding Specialist</b>	
			1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705	
			Power Transformer	
			EPL Series, 48V, 1.375" High	
			SIZE: DIM. NO.	REV
			EPL-48-30	A
			SCALE: 1=1	
			SHEET 1 OF 1	