


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	9/03/04	JLU		9/03/04

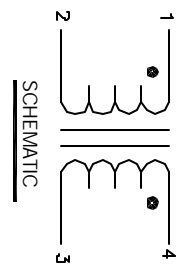

6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION APPROX





5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN
 CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION
 HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO
 WIRE SIZE DIAMETER = 0.35 MILLIMETER
 NUMBER OF TURNS= 105
 DCR = 0.90 MILLI-OHMS MAX
 CURRENT RATING = 0.75A AC
 L = 22.00 mH MIN @ 10 KHZ, 0.250 Vrms;
 3 SPECIFICATIONS@ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
 NOTES: UNLESS OTHERWISE SPECIFIED.

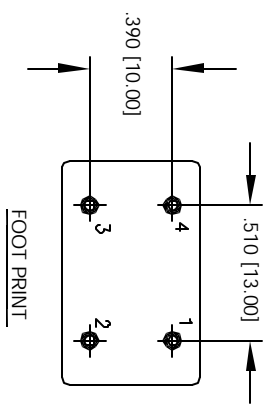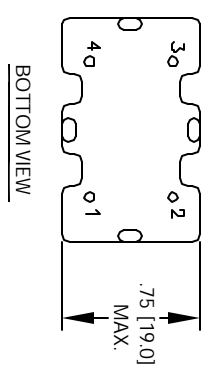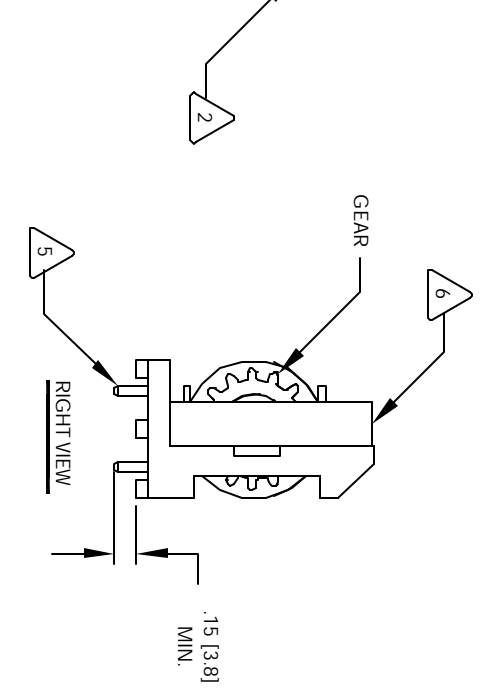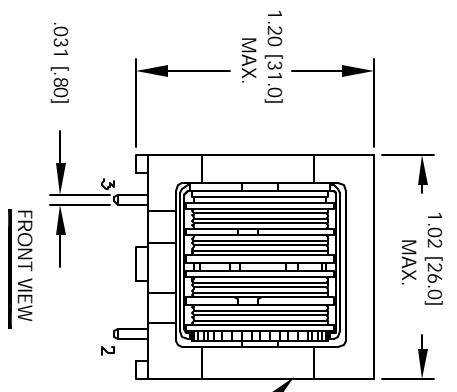

QTY	UM	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
					PARTS LIST	
					COILS.COM, INC	
					1510 E. Edinger Ave	
					Unit B, Santa Ana, CA, 92705	
					Common Mode Line Filter	
					Vertical Mount	
					SIZE DIM. IN.	REV
					B	A
					24V_22K	
					SCALE 1=1	SHEET 1 OF 1