


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	9/03/04	JLU		9/03/04

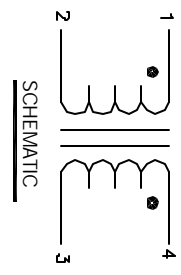

6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION APPROX





5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN
 CONSTRUCTION:

INSURE INTERGRITY OF WINDING SEPARATION
 HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO
 WIRE SIZE DIAMETER = 0.65 MILLIMETER
 NUMBER OF TURNS = 32
 DCR = 0.08MILLI-OHMS MAX
 CURRENT RATING = 2.6A AC
 L = 2.20 mH MIN @ 10 KHz, 0.250 Vrms;
 SPECIFICATIONS@ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
 NOTES: UNLESS OTHERWISE SPECIFIED.

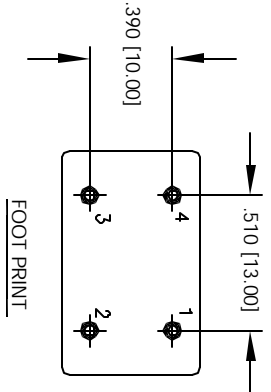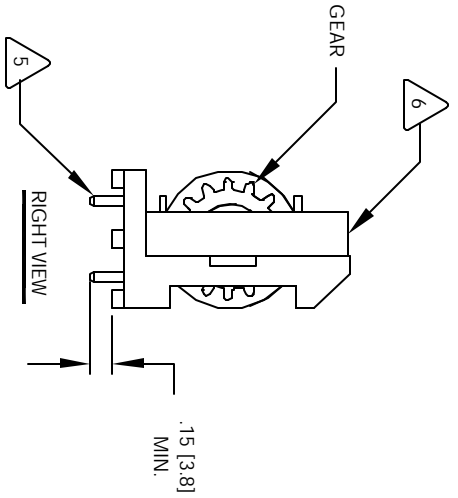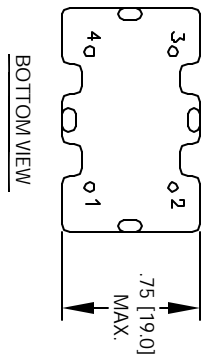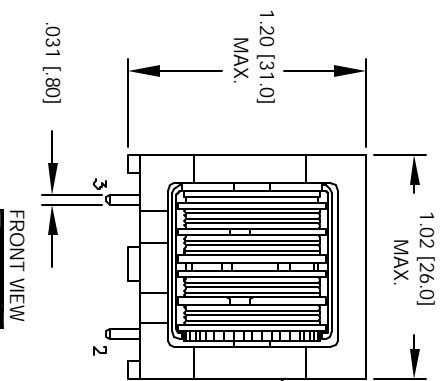

QTY	UM	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
					PARTS LIST	
AUTOCAD SOLIDWORKS		X				
UNLESS OTHERWISE SPECIFIED						
PALSQUING AND TOLERANCE PER ANSI Y14.5M						
ALL DIMENSIONS ARE IN INCHES AND (MILLIMETERS)						
TOLERANCE ANGLES						
XXXX±.010 .XX±.015						
TOLERANCE METRICS						
XXXX±.254 .XX±.38						
ANGLE PRECISION						
DO NOT SCALE DRAWING						
TITLE: Common Mode Line Filter Vertical Mount						
DRAWN: RFR		DATE: 6/03/04				
CHECKED: JLU		DATE: 6/03/04				
APPROVED: KSUM		DATE: 6/03/04				
SIZE: DIM. IN. B		SCALE: 1=1				
REV: A						