


The information contained in this drawing is the sole property of CWS Coil Winding Specialists. Any reproduction in part or whole without written permission of CWS Coil Winding Specialists is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRODUCTION RELEASE	3/16/06	RPR	JLJU	3/16/06



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION APPROX





5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO WIRE SIZE DIAMETER = 0.40 MILLIMETER NUMBER OF TURNS=110 DCR= 0.77 OHMS MAX CURRENT RATING = 0.9A AC L= 33.0 mH MIN @ 10 KHZ, 0.250 Vrms; SPECIFICATIONS@ 25 °C

3 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART CORE: SINGLE PIECE FERRITE H CORE

2 BOBBIN RATING CLASS B (130°) REQUIRED MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

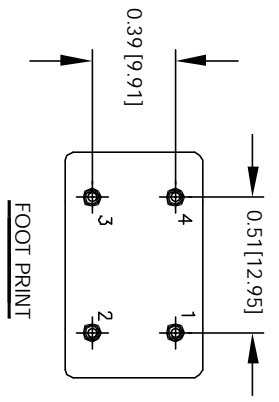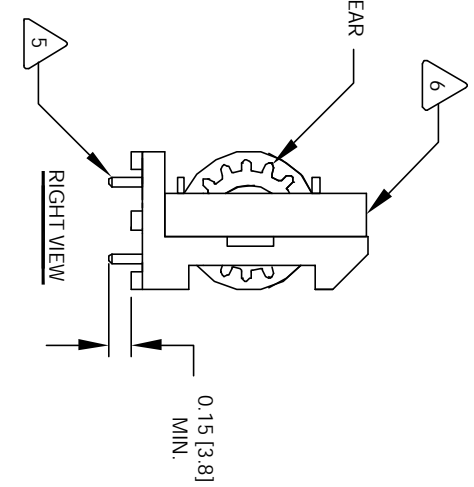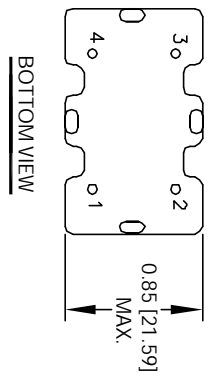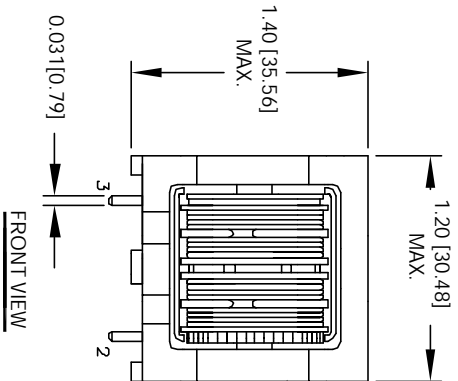

UNLESS OTHERWISE SPECIFIED	DO NOT SCALE DRAWINGS
DIMENSIONING AND TOLERANCE PER ANSI Y14.5M	
ALL DIMENSIONS ARE IN INCHES AND (DIMENSIONS)	
TOLERANCE INCHES: <math>\pm 0.030</math>	
MILLIMETERS: <math>\pm 0.10</math>	
ANGLE PROJECTION: <math>45^\circ</math>	

QTY	UM	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
		X		Common Mode Line Filter Vertical Mount	
PARTS LIST					
AUTOCAD SOLIDWORKS SIGN			CWS Coil Winding Specialist. 353 W. GROVE AVE. ORANGE, CA. 92865		
DATE			3/16/06		
DRAWN RPR			3/16/06		
CHECKED JLJU			3/16/06		
ENGR. KSUM			3/06/06		
APPR. JLJU			3/16/06		
SIZE: DIM. IN. B			28V-33K		
SCALE: 1=1			SHEET 1 OF 1		
			REV A		