


The information contained in this drawing is the sole property of CWS Coil Winding Specialists. Any reproduction in part or whole without written permission of CWS Coil Winding Specialists is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
B		PRODUCTION RELEASE	1/10/07	JLJU		1/10/07



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
 MARK PART NUMBER AND REVISION APPROX





5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION
 HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO WIRE SIZE DIAMETER = 1.0 MILLIMETER
 NUMBER OF TURNS = 16
 DCR = 0.03 OHMS MAX
 CURRENT RATING = 6.0A AC
 L = 1.00 mH MIN @ 10 KHZ, 0.250 Vrms;
 3 SPECIFICATIONS @ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
 CWS BYTE-MARK OR OTHER APPROVED PART
 CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
 NOTES: UNLESS OTHERWISE SPECIFIED.

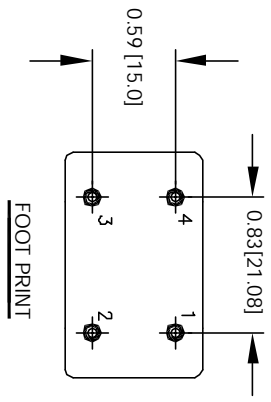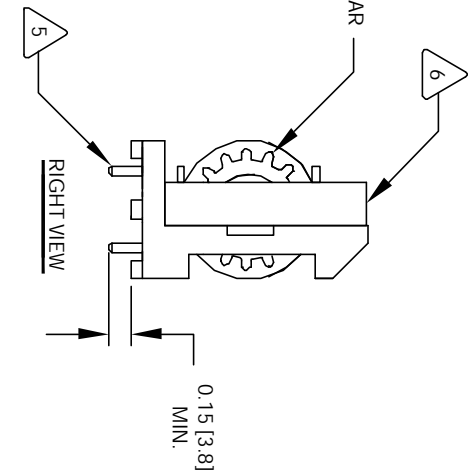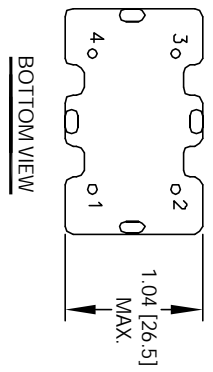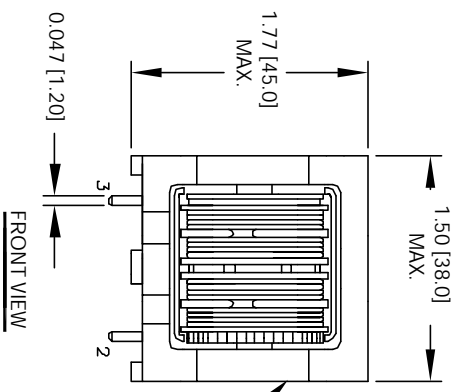

QTY	UM	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
					COIL WS COM, INC	
					WWW.COILWS.COM	
					CWS Coil Winding Specialist.	
					353 W. GROVE AVE.	
					ORANGE, CA. 92865	
PARTS LIST						
TITLE: Common Mode Line Filter Vertical Mount						
SIZE: DIM. IN. 35V-1K0						
SCALE: 1=1						
SHEET 1 OF 1						