



The information contained in this drawing is the sole property of Coil Winding Specialist. Any reproduction in part or whole without written permission of Coil Winding Specialist is prohibited.

REVISION HISTORY		SIGN & DATE				
REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
B	N/A	UPDATED ELECTRICAL SPEC.	JLU	10/27/15	AK	10/27/15

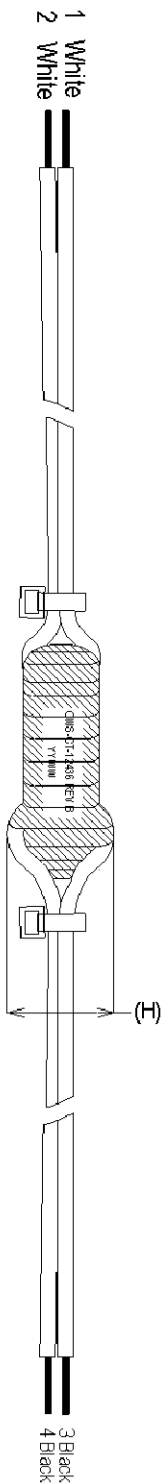

DIMENSION TOLERANCE	
C	10.0 \pm 2.0
D	1.85 max.
E	1066.8 \pm 15.0
L	44.0 max.
H	20.5 max.

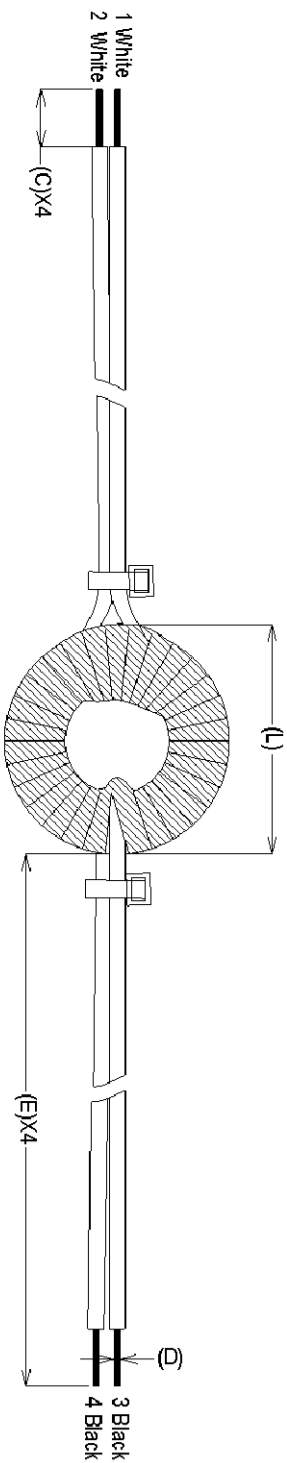

Top View

- PIN(3-4) = 1Ts +/- 2%
- C POLARITY & TURN RATIO: PIN (1-2), AT 20KHZ, 1V 1000TS
- R(3-4) = 65mΩ MAX
- R(1-2) = 18.0Ω MAX
- B DC RESISTANCE AT 25°C
- A L(1-2) = 3.63H MIN
- INDUCTANCE: AT 1KHZ, 0.1V;

NOTES: UNLESS OTHERWISE STATED, READ NOTES FROM BOTTOM UP

PARTS LIST		TITLE	
AUTOCAD	X	SALES@COILWS.COM/	CWS Coil Winding Specialist.
SOLIDWORKS		WWW.COILWS.COM	353 W Grove Ave Orange, CA 92665
DRWN	AK	10/27/15	
ENGR	JM	10/27/15	
ENGR	JLU	10/27/15	
APPR.	JLU	10/27/15	
SIZE	INCH. NO.	CWS-CT-12436	REV B
SCALE	N/A		
SHEET	1	OF	1

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES:
ANGULAR: +/- 1°
MACH +/- .25° BEND +/- .50°
ONE PLACE DECIMAL +/- .01
TWO PLACE DECIMAL +/- .005
THREE PLACE DECIMAL +/- .01
RADIUS +/- .01
FRACTIONAL +/- 1/16

DO NOT SCALE DRAWING