
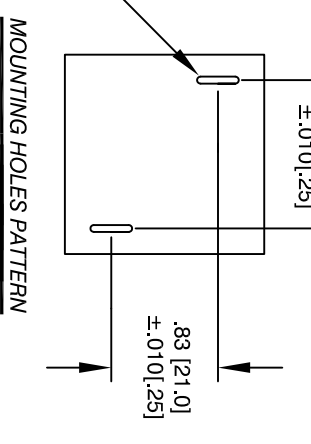

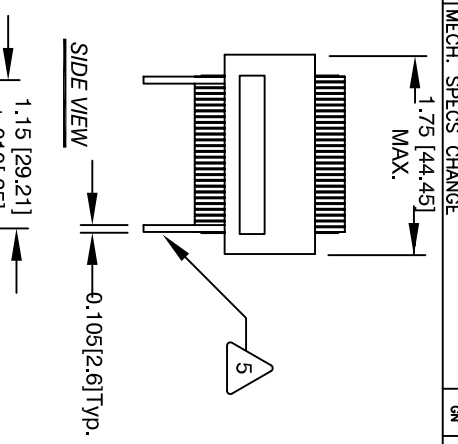


The information contained in this drawing is the sole property of Coil Winding Specialist, Inc. Any reproduction in part or whole without written permission of Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
D		PRODUCTION RELEASE	BUN	6/06/07	JLJU	6/06/07
D1		UPDATED SPECIFICATIONS	GN	2/07/11	JLJU	2/07/11
D2		UPDATED SPECIFICATIONS	AK	6/18/12	JLJU	6/18/12
E		MECH. SPECS CHANGE	GN	8/13/12	AK	8/13/12

- 8 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- \*\*IMPORTANT\*\*  
TO ACHIEVE THE DESIRED INDUCTANCE AND DCR THE CORES MUST TOUCH EACH OTHER
- 7 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION APPROX OVER CORES, (PER NOTE 2)
- 6 APPLY EPOXY ON MATINGS SURFACES AND WRAP TAPE
- 5 REMOVE INSULATION AND TIN LEADS
- 4 CONSTRUCTION

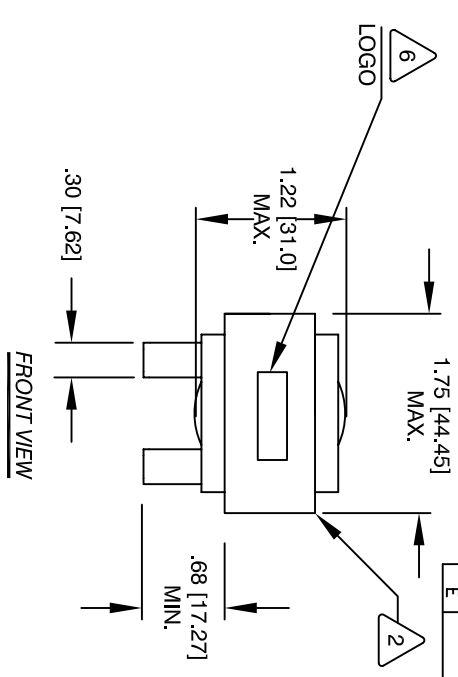

- 3 SPECIFICATIONS: Q = 50 MIN  
VARNISHED WITH DOLPH  
EPOXY: UNIBON OR CWS APPROVED PART  
OUTER WRAP: 3M GLASS CLOTH OR CWS APPROVED PART  
WIRE: UL RECOGNIZED 200°C RATED MAGNET WIRE  
CORE: SENDUST/KOOLMU POWDER CORE @ 300°C
  - 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- INSULATION CLASS 200°C REQUIRED
- NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			<b>PARTS LIST</b>	
			<b>www.coilws.com</b>	
			<b>Coil Winding Specialist, Inc.</b>	
			<b>353 W GROVE AVE</b>	
			<b>ORANGE, CA 92865</b>	
			<b>DATE</b>	
			<b>6/06/07</b>	
			<b>DRWN</b>	
			<b>BUN</b>	
			<b>6/06/07</b>	
			<b>CHKD</b>	
			<b>JLJU</b>	
			<b>6/06/07</b>	
			<b>ENGR</b>	
			<b>KSUM</b>	
			<b>6/06/07</b>	
			<b>APPR</b>	
			<b>JLJU</b>	
			<b>6/06/07</b>	
			<b>SCALE</b>	
			<b>NOT TO SCALE</b>	
			<b>SHEET 1 OF 1</b>	
			<b>SIZE</b>	
			<b>ENG. NO.</b>	
			<b>E70340-010</b>	
			<b>REV</b>	
			<b>E</b>	