



The information contained in this drawing is the sole property of Coil Winding Specialist, Inc. Any reproduction in part or whole without written permission of Coil Winding Specialist, Inc. is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	BY	DATE	CHK	DATE
A	131030	PRODUCTION RELEASE	AK	07/05/16	BO	07/05/16

DIMENSIONS

	mm	In
A	85.60±0.51	3.37±0.02
B	40.13±1.27	1.58±0.05
C	61.21±1.27	2.41±0.05
D	11.43 Ref.	0.45 Ref.
E	13.46 Ref.	0.53 Ref.
F	11.18 Ref.	0.44 Ref.
G	1.0x7.5 Ref.	0.039x0.295 Ref.
H	2.72 Min.	0.107 Min.
I	4.06 Min.	0.160 Min.
J	20.50±0.38	0.81±0.015
K	37.00±0.38	1.457±0.015
P1	29.96 Ref.	1.14 Ref.
P2	34.29 Ref.	1.35 Ref.

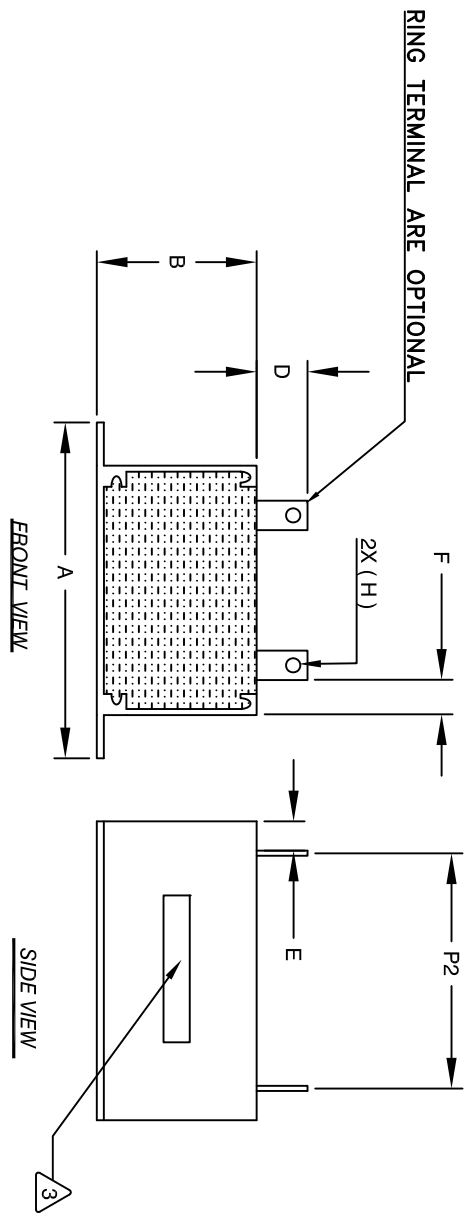

DC-BIAS	L
0A	127 uH
5A	123 uH
10A	117 uH
15A	109 uH
20A	99 uH
25A	87 uH
30A	85 uH
40A	73 uH

- APPLICATION: ENERGY STORAGE FILTER, SWINGING CHOKE
- BUILT TO ROHS COMPLIANCE.
- MARK PART NUMBER AND REVISION WHERE SHOWN

WEIGHT: 555.0 GRAM (TYP)
 MAX INDUCTOR TEMP RATING: 200°C
 APPROPRIATE AIR FLOW.
 RECOMMENDED AMBIENT OPERATING TEMP: -40°C TO 85°C WITH
 HI-POT TEST 1000VDC @ 2mA, 1 MIN. TERMINALS TO CASE
 INTERWINDING CAPACITANCE @ 10KHZ = 18 pF (TYP)
 |Z|@SRF=6.8 KIL-OHM (TYP)
 SRF=3.4 MHZ (TYP)
 RATED CURRENT: 45 AMPS
 DCR= 6.6 MILLIOHM MAX.
 L@DC BIAS: SEE TABLE
 L= 130 uH ± 15% AT 10 KHZ, 0.25V, ZERO DC BIAS

- SPECIFICATIONS:
 ENCLOSURE: ALUMINUM METAL
 WIRE: 200°C RATED MAGNET WIRE UL APPROVED
 CORE: POWDER CORE
- MATERIALS:

NOTES: UNLESS OTHERWISE SPECIFIED, READ FROM BOTTOM UP.
 CAGE CODE: 5DME2

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
			PARTS LIST	
			High Current Helical Inductor	
			130 uH, 45 Amps, Horizontal	