


The information contained in this drawing is the sole property of Coil Winding Specialist, Inc. (CWS). Any reproduction in part or whole without written permission of CWS is prohibited.

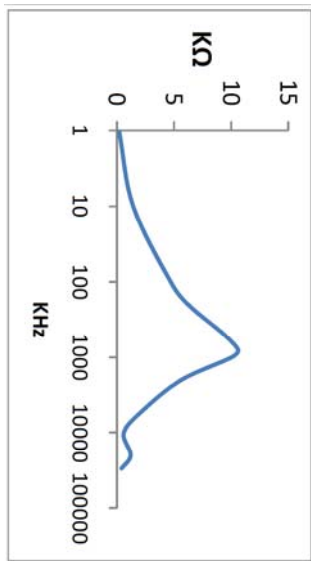





DIMENSIONAL TOLERANCE INCHES [MM]					
A(OD) Max	B(WIDTH) Max	C(LEAD) Min	D(LEAD DIA) TYP	E (Min/Max)	P1 Ref
1.20 [30.5]	0.73 [18.6]	0.5 [12.7]	0.04 [1.02]	0.70 [17.8]	0.50 [12.70]

REVISION HISTORY					
REV	ECN	DESCRIPTION	BY	DATE	DATE
B		ELEC. AND MECH. UPDATE	GN	03/17/11	03/17/11
B1		REVISE DESCRIPTION	JL	07/07/17	07/07/17

- 6 BUILT TO ROHS COMPLIANCE AND LEAD FREE.
- 5 MARK PART NUMBER AND REVISION.
- 4 TIN LEADS APPROX. 0.5 INCH AND FLUSH WITH THE COIL EDGE.

- 2 WIRE: UL CLASS 200°C
CWS BYTEMARK OR OTHER APPROVED PART
CORE: NANOCRYSTALLINE OR AMORPHOUS CORE
- 1 BOBBIN/CASE = UL CLASS B (130°)
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP.

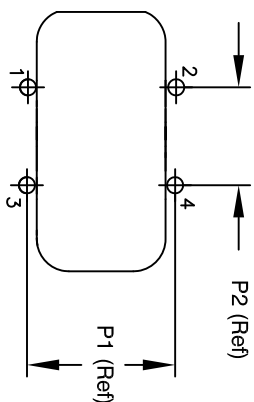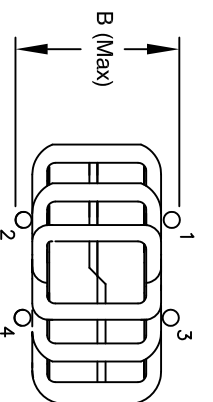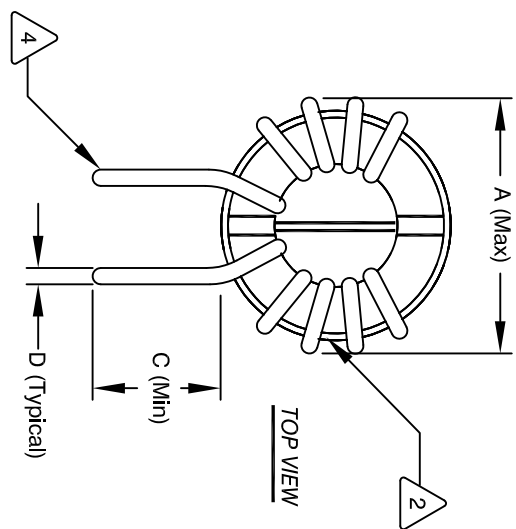

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.

AUTOCAD SOLIDWORKS		PARTS LIST	
SIGN	DATE	MFG. P/N	DESCRIPTION

TITLE:		CAGE# 5DME2	
Nanocrystalline Inductor			
Common Mode Chokes			
Vertical Mount			

DRWN	CHKD	ENGR	APPR	DATE	SIZE	SCALE	SHEET	OF
RLAU	AK	JLJU	JLJU	12/16/10	B	NOT TO SCALE	1	1