
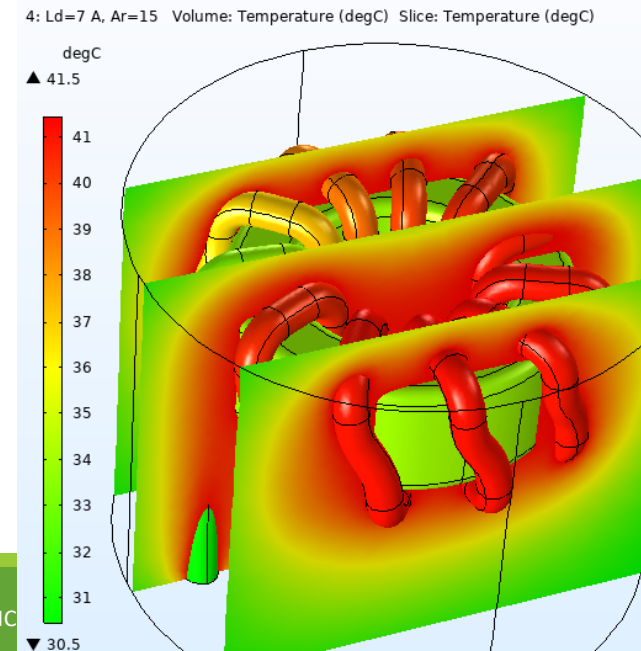
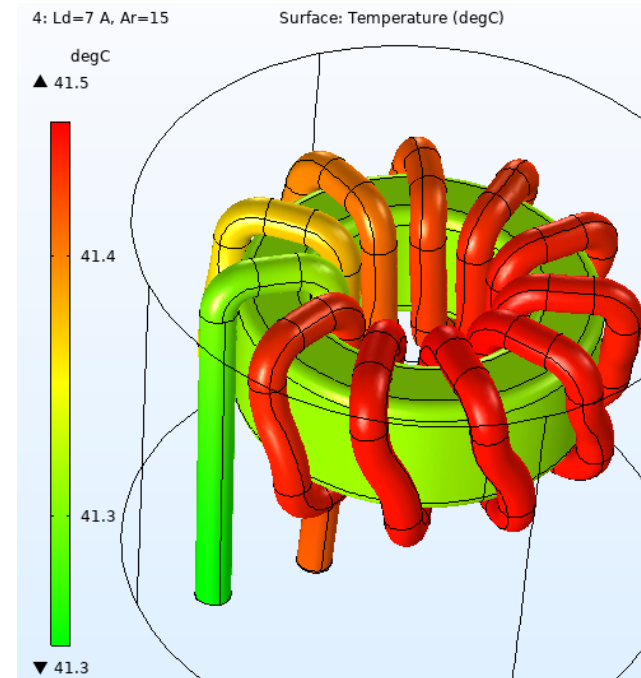
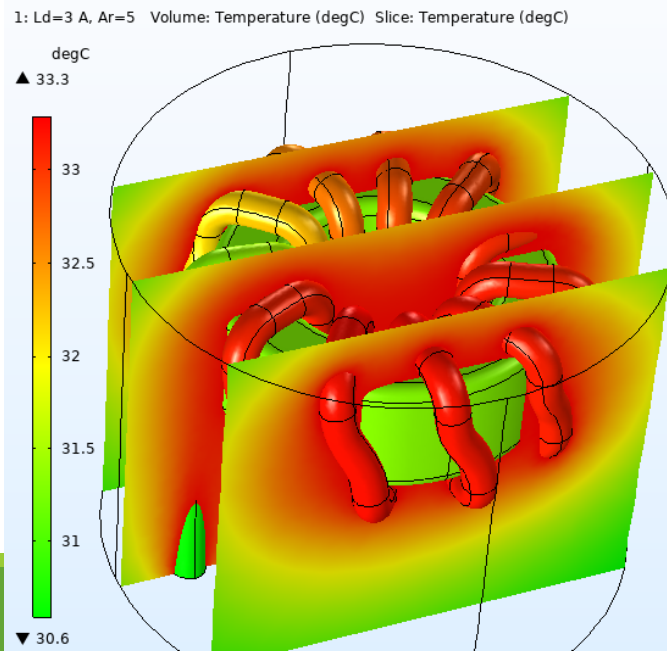


Thermal and Electromagnetics simulation – Part # HF127-5R6M-10A – Current rated 10A @ 1kHz




Current 30% (3A)
No Airflow
Natural convection


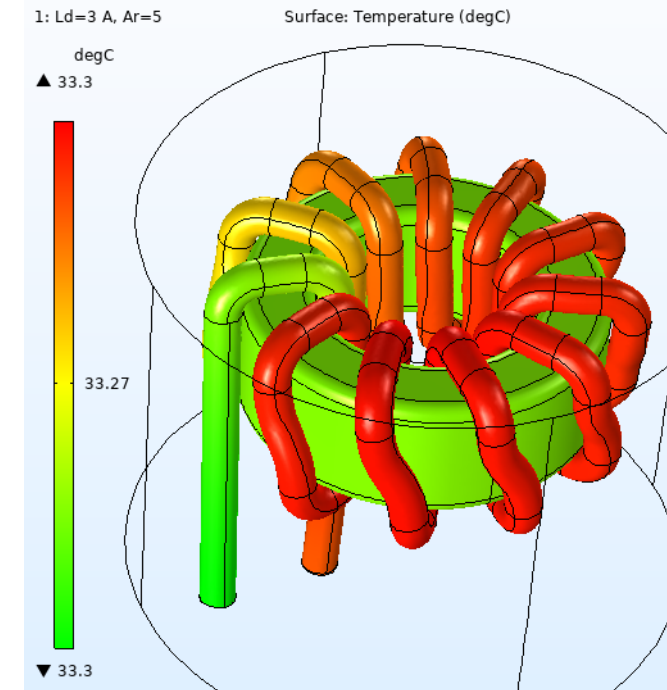


Current 75% (5A)
15 W/ (m²K) or 3 m/s
air flow.

Thermal and Electromagnetics simulation – Part # HF127-5R6M-10A – Current rated 10A @ 1kHz

4: Ld=7 A, Ar=15 Volume: Magnetic flux density norm (T) Multislice: Magnetic flux density norm (T)

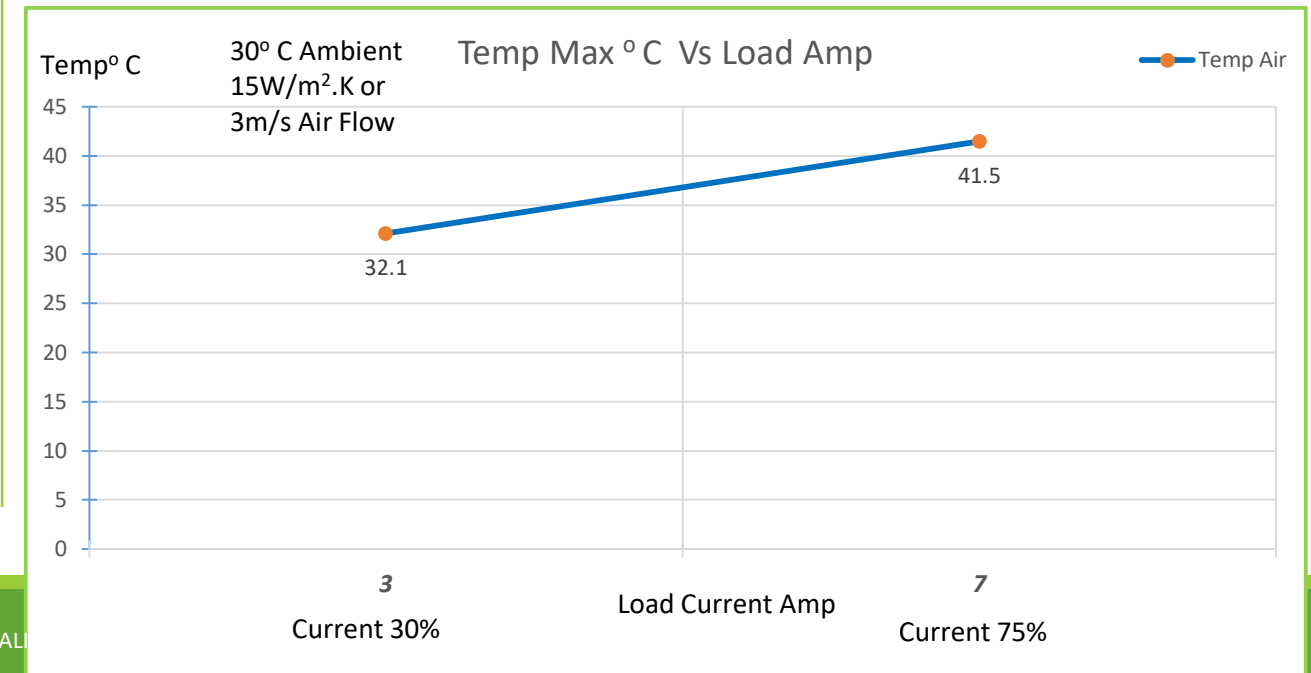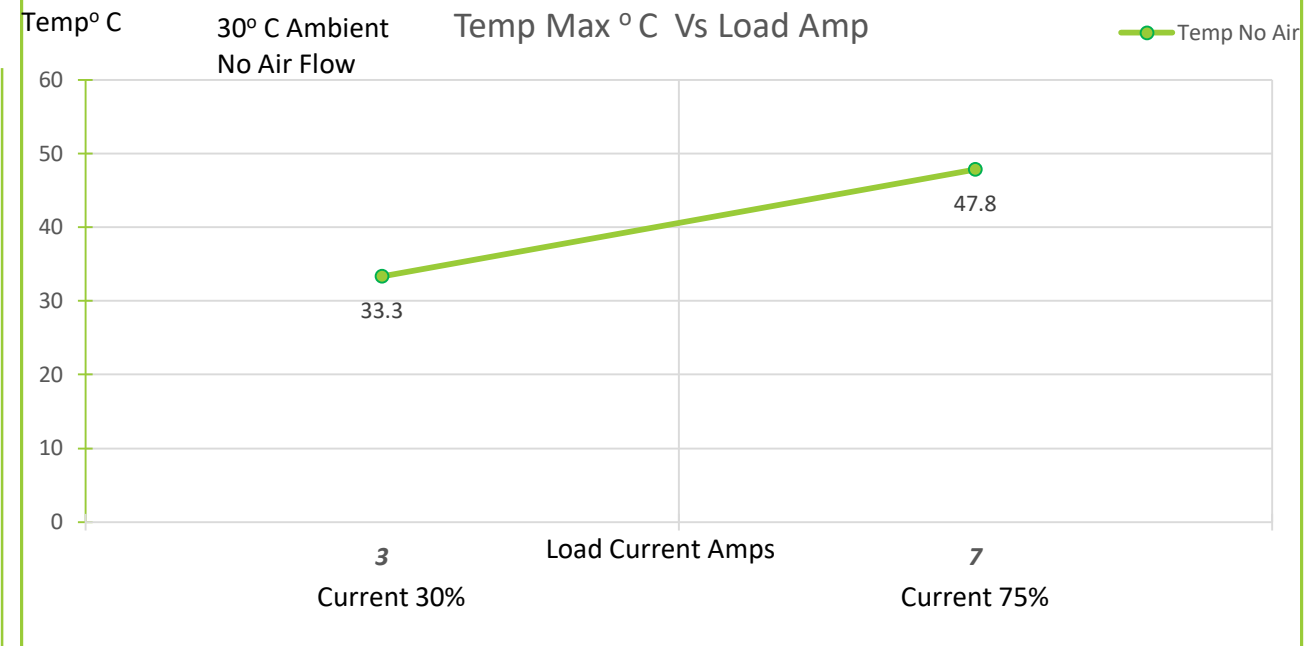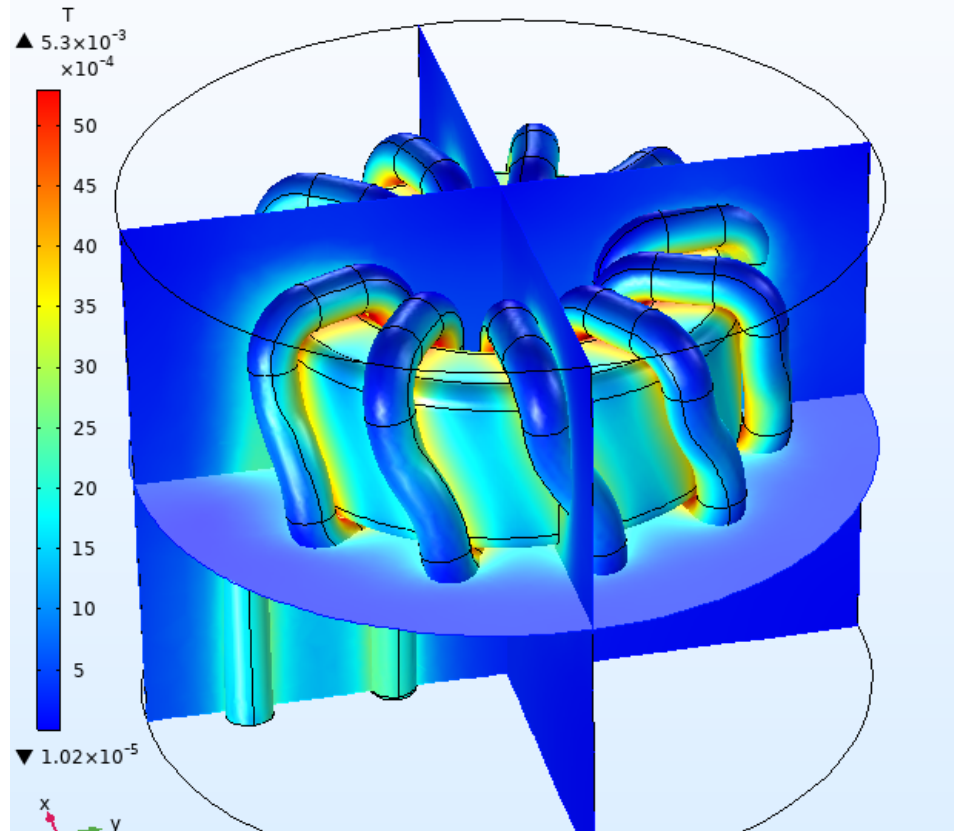

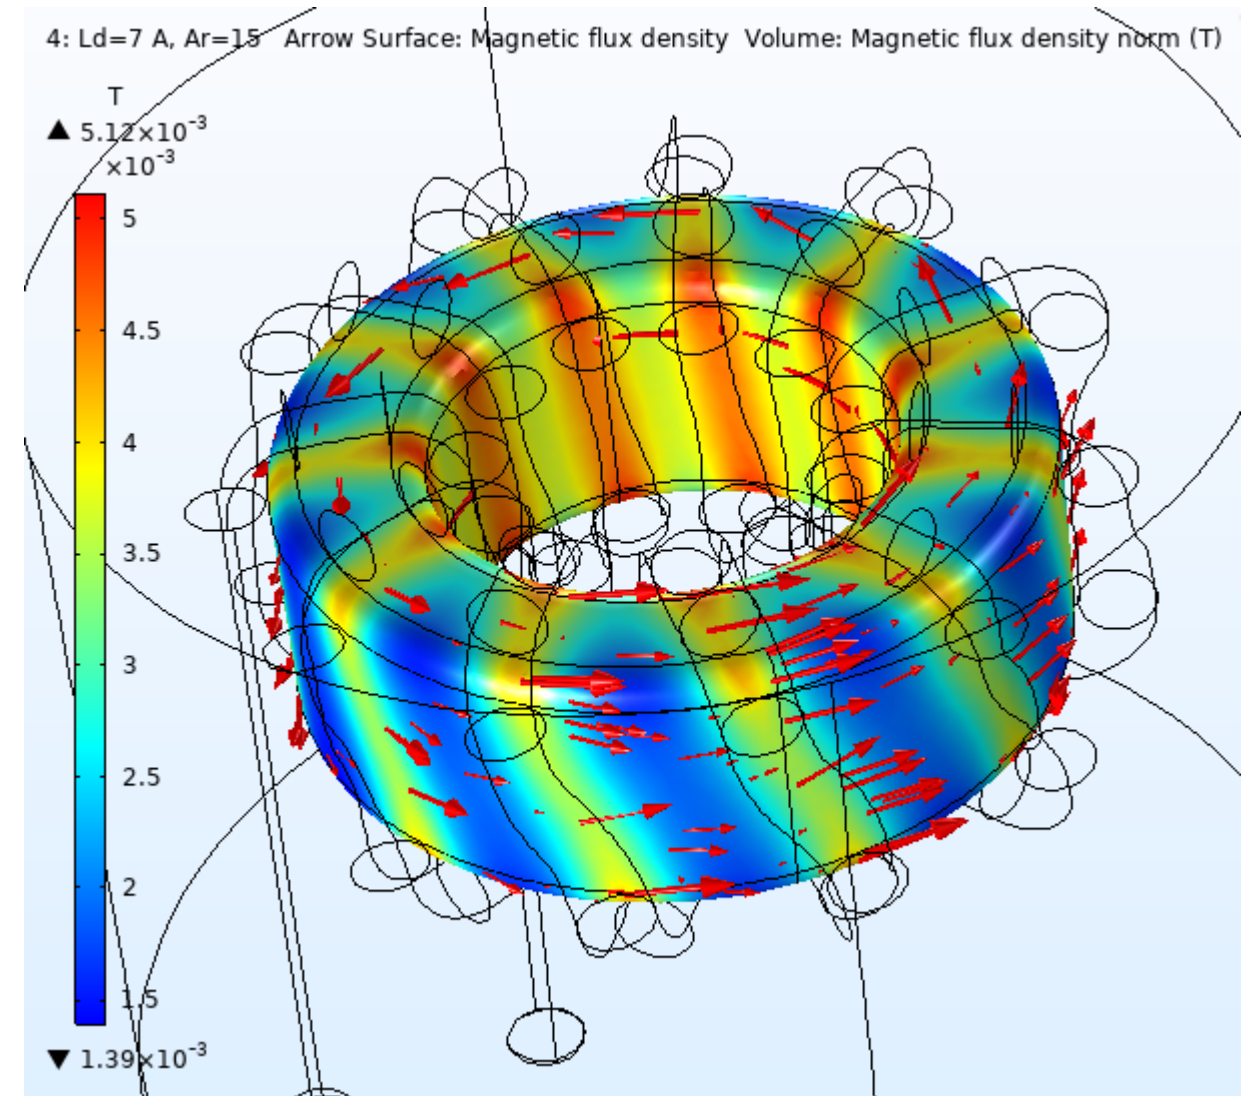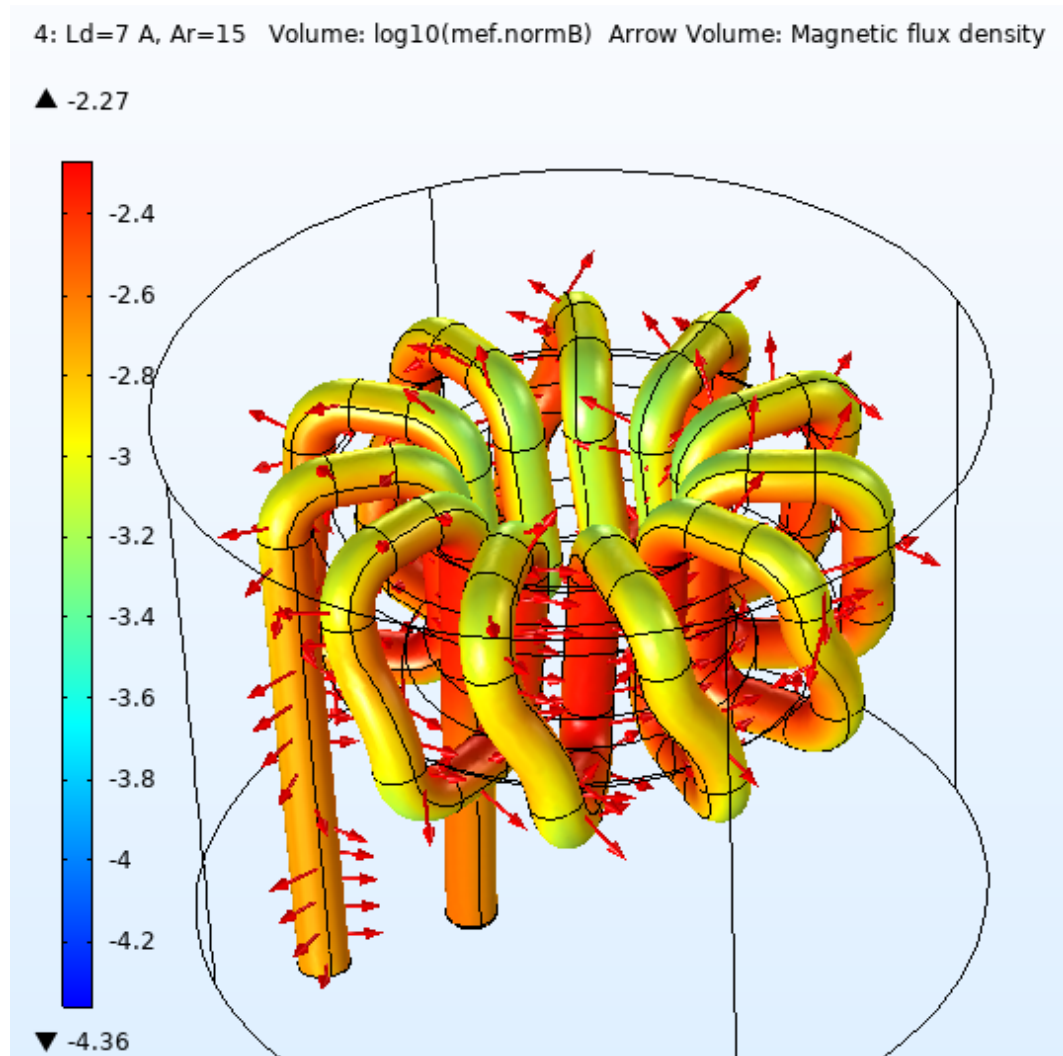

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.