
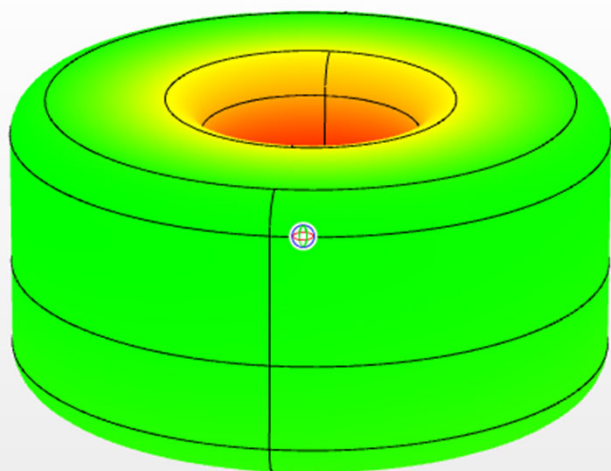


Thermal and Electromagnetics simulation – Part# SN270-330M-13.0AH– Current rated 13A @ 1kHz

Current 30% (3.9A)
No Airflow
Natural convection



Lp=3.9 A, Ar=5

Surface: Temperature (degC)

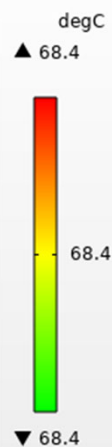



Lp=3.9 A, Ar=5

Slice: Temperature (degC)

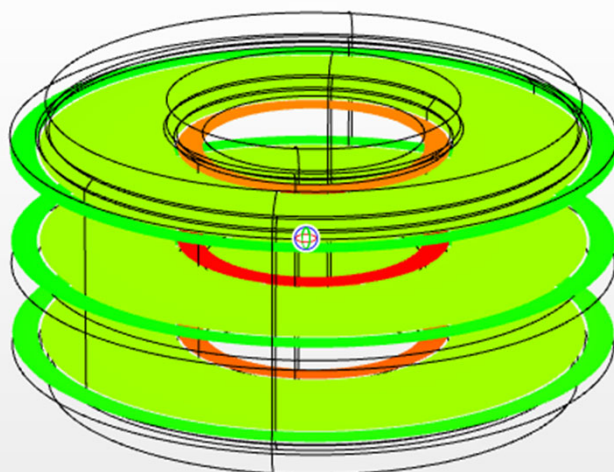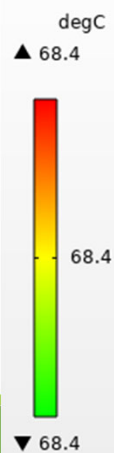

Lp=9.1 A, Ar=15



Surface: Temperature (degC)

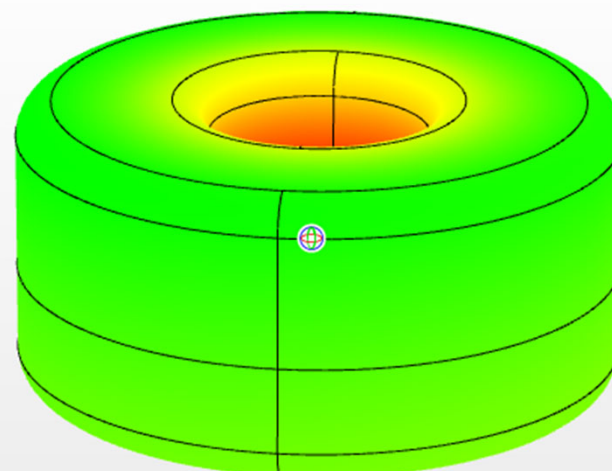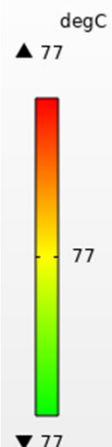




Current 70% (9.1A)
15 W/(m²K) or 3 m/s
air flow.

Lp=9.1 A, Ar=15

Slice: Temperature (degC)

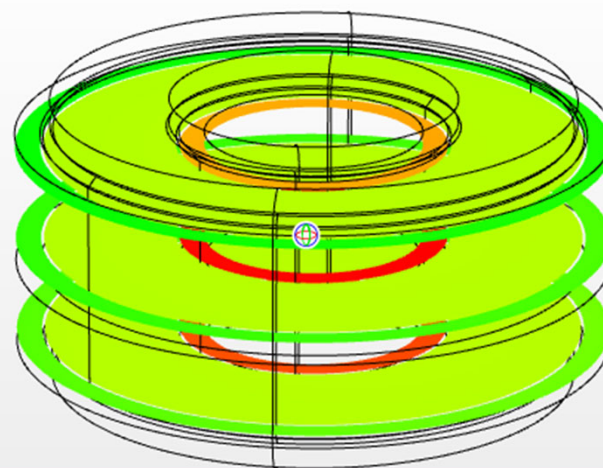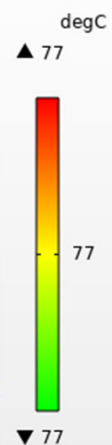


Thermal and Electromagnetics simulation – Part# SN270-330M-13.0AH– Current rated 13A @ 1kHz

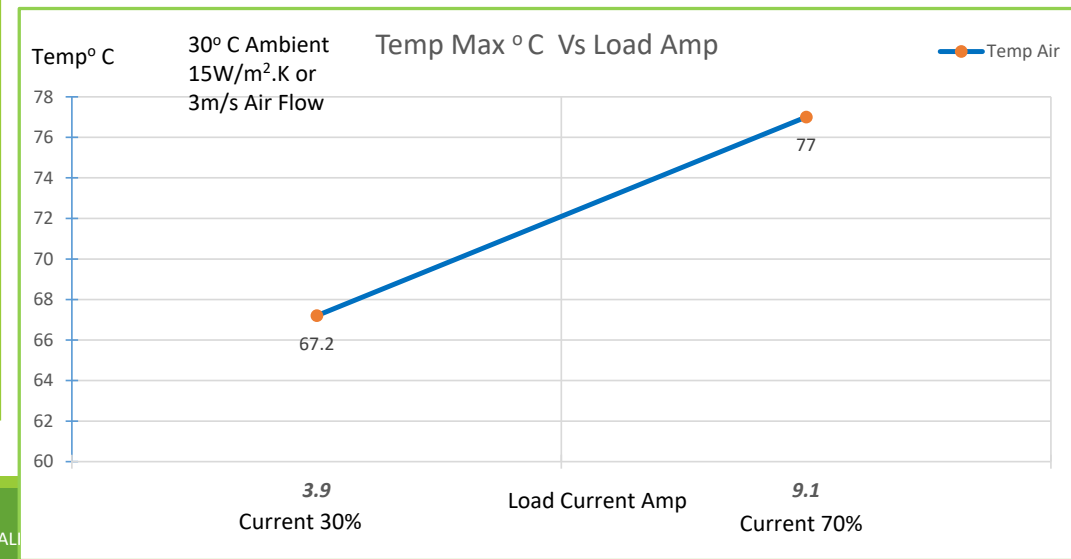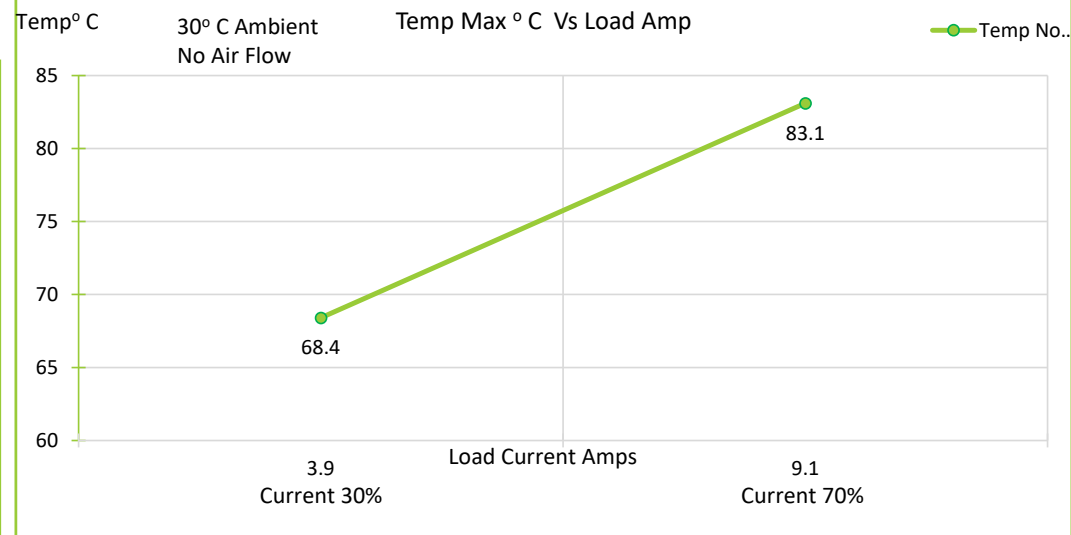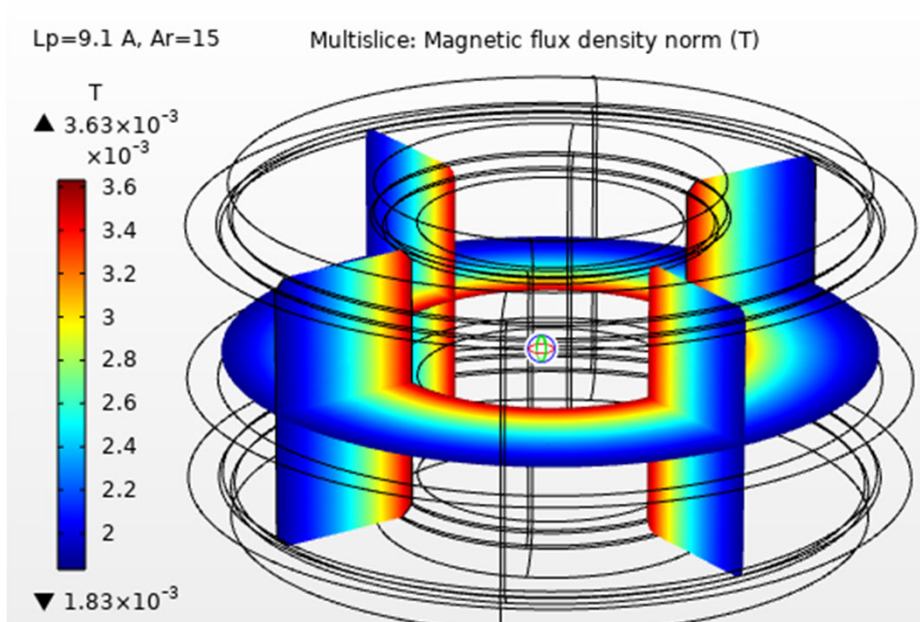


Thermal and Electromagnetics simulation – Part# SN270-330M-13.0AH– Current rated 13A @ 1kHz

Magnetics Flux in Coil

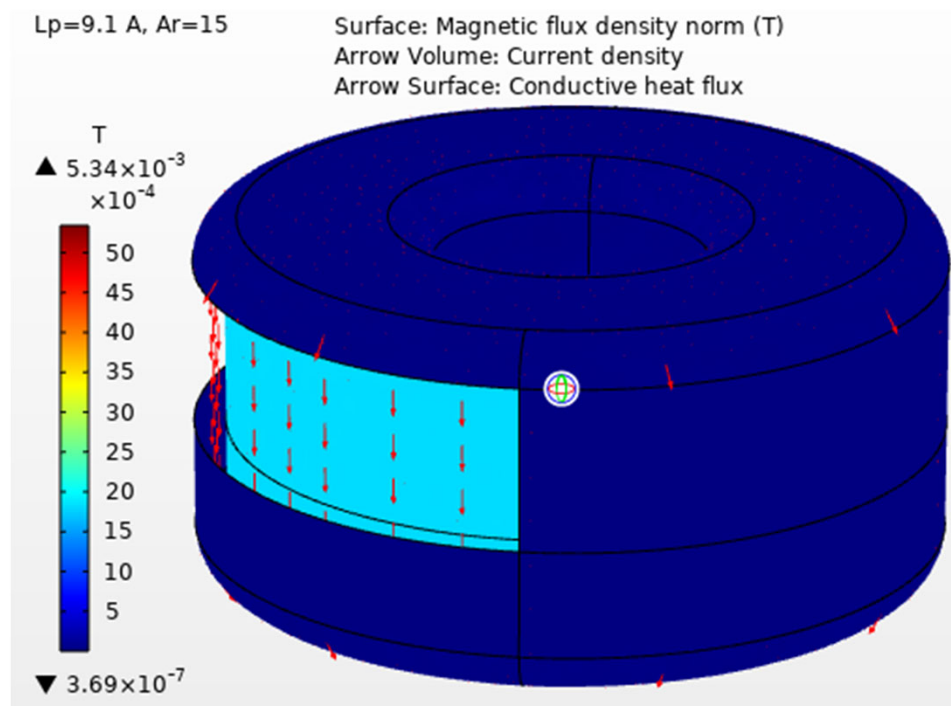

Magnetic Flux in Core

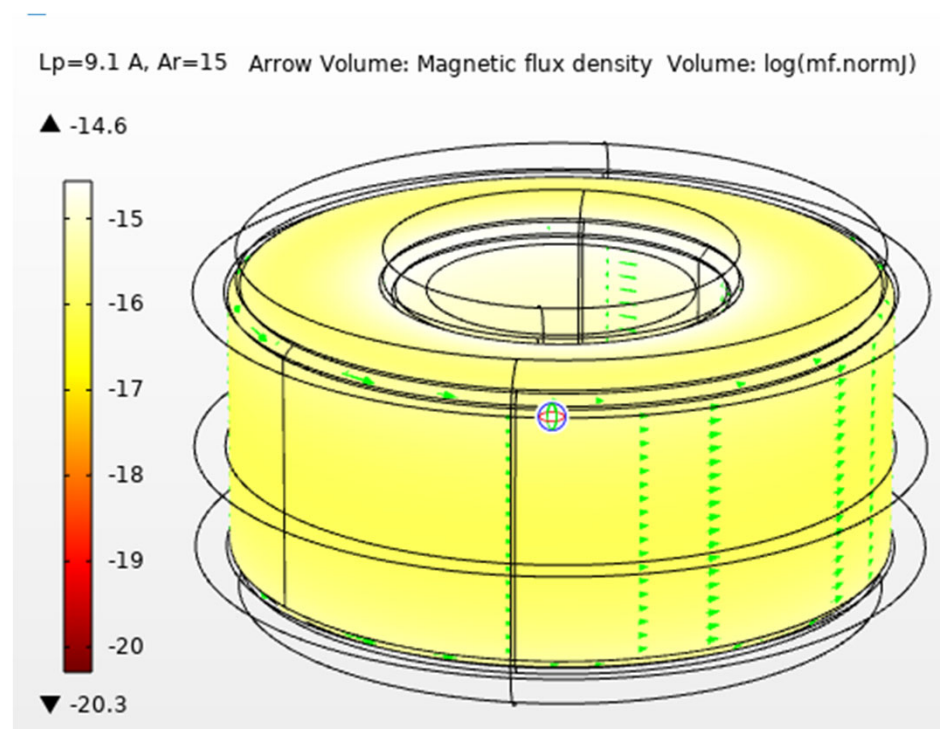

Abbreviations

Ld	: Current rated Amps
Ar	: Airflow
W/m ² .K	: Watts / Sq meter .Kelvin – Heat Convection rate
m/s	: Meter/ Second - Airflow
degC	: Temperature in Deg C
T	: Tesla – Magnetic Flux density
Temp	: Temperature
Temp max:	Temperature Maximum
Amb	: Ambient Temperature
Amps	: Ampere Load current.
Slice	: Sectional view

Note : For the modeling purpose the winding is considered as homogenous multilayer winding .

Disclaimer :

- Simulation MODEL is an effective tool for evaluating product performance by simulation; however, it does not simulate product performance in all test environments and is not intended to be a replacement for testing of the actual device by means of a test board or otherwise.
- Simulation results are for reference purposes only; CUSTOMER shall perform thorough testing using the actual device.