



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY			
REV	ECN	DESCRIPTION	DATE
A		PRODUCTION RELEASE	1/13/05

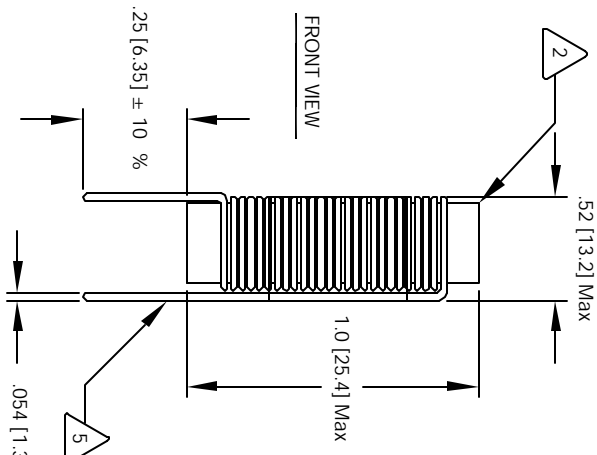

MOUNTING HOLES PATTERN



- 1 MATERIAL: WIRE INSULATION - UL RECOGNIZED 94V-0 FOR FLAMMABILITY
- 2 CORE: MANGANESE ZINC FERRITE ROD
- 3 SPECIFICATIONS: MAX RMS (DC) CURRENT = 10 AMPS
 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
 CWS BYTEMARK OR OTHER APPROVED PART
 CORE: MANGANESE ZINC FERRITE ROD
- 4 CONSTRUCTION:
 WIND COILS EVENLY SPACED
 MAX TEMP RISE AT MAX CURRENT = 40 °C
 HI-POT TEST FOR CORE TO WINDING = 500 VDC
 DCR = 20 MILLI-OHMS MAX @ 25 °C
 SATURATION CURRENT = 10 AMPS
 L = 15 uH ± 10%, 15.75 KHZ, 0.1 Vrms, 0 ADC;
 SPECIFICATIONS: MAX RMS (DC) CURRENT = 10 AMPS
- 5 REMOVE INSULATION AND TIN LEADS
- 6 NOTES:
 EPOXY LEADS TO CORE
 .05" ABOVE THE CORE EDGE, AND
 INDUCTANCE DROPS 10% FROM ZERO ADC VALUE
 SATURATION CURRENT IS THE CURRENT AT WHICH THE
 TEMP. RISE ABOVE AMBIENT OF 25 °C.
 MAX DC CURRENT IS AVERAGE CURRENT FOR 40 °C

NOTES: UNLESS OTHERWISE SPECIFIED, POWER INDUCTOR, DIMENSIONS IN INCHES [MM], READ FROM BOTTOM UP

UNLESS OTHERWISE SPECIFIED	DO NOT SCALE DRAWING
TOLERANCE AND FINISHES	±.0005
TOLERANCE METRICS	±.0005
ANGLE PROJECTION	AS SHOWN

CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
AUTOCAD SOLIDWORKS SIGN	X	PARTS LIST	
DATE	DATE	CWS Coil Winding Specialist	
TKK	1/13/05	1510 E. Edinger Ave	
JLJU	1/13/05	www.cowis.com	
DKR	1/13/05	Unit B, Santa Ana, CA, 92705	
JLJU	1/13/05	Power Chokes	
		Vertical Mount	
		SIZE: DIM. IN.	REV A
		SCALE: B	
		2=1	
		SHEET 1 OF 1	