



The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK	DATE
A		PRE-PRODUCTION RELEASE	4/23/03	JKU		4/23/03

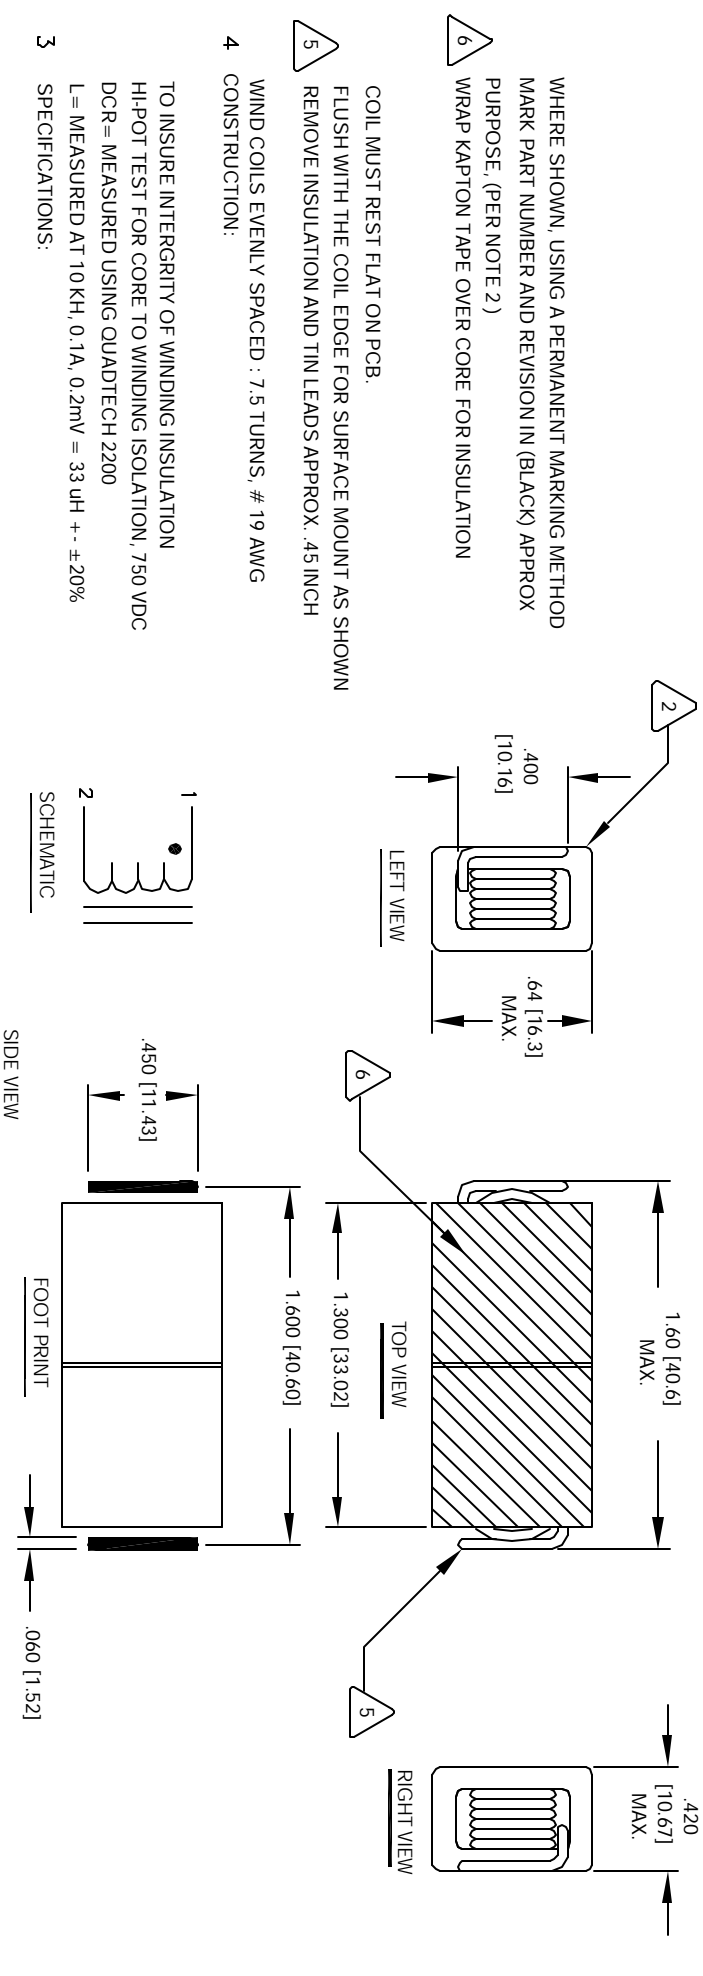

1. TO INSURE INTEGRITY OF WINDING INSULATION HIPOT TEST FOR CORE TO WINDING ISOLATION, 750 VDC DCR = MEASURED USING QUADTECH 2200 L = MEASURED AT 10 KH, 0.1A, 0.2mV = 33 uH +- ±20% SPECIFICATIONS:
2. OUTER WRAP: KAPTON TAPE WIRE: UL RECOGNIZED 200° RATED MAGNET WIRE CWS BYTEMARK OR OTHER APPROVED PART CORE: MPB BALUN RECTANGULAR
3. INSULATION RATING: 200° C REQUIRED MATERIAL: UL RECOGNIZED 94V-0 FOR LAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
				PARTS LIST	
				COILS COM, INC	
				1510 E. Edinger Ave.	
				Unit B, Santa Ana, CA, 92705	
				DIFFERENTIAL MODE INDUCTOR	
				10A (max), 6A (nom)	
				CWS-100107	
				SCALE 2=1	
				SHEET 1 OF 1	