
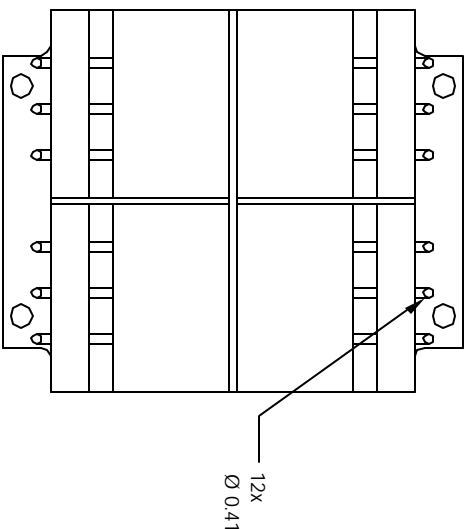
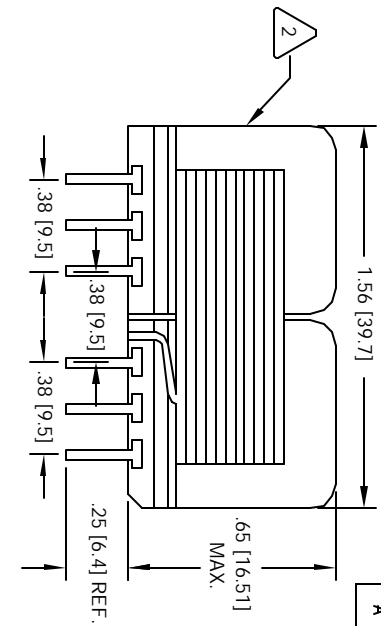


The information contained in this drawing is the sole property of CWS/Spokane and may be released in part or whole without written permission of CWS/Spokane, Inc. production.


REVISION HISTORY

REV	ECN	DESCRIPTION	SENT & DATE			
			BY	DATE	CHK	DATE
A		PRODUCTION RELEASE	TKK	4/15/05	JLAW	4/15/05

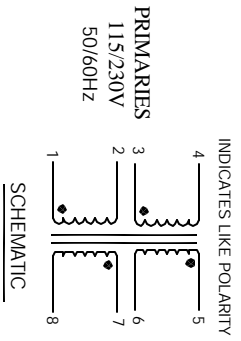

- 5 WHERE SHOWN, USING A PERMANENT MARKING METHOD MARK PART NUMBER AND REVISION
- CONTACT CWS FOR MORE INFORMATION BUT NOT CERTIFIED OR TESTED BY THESE AGENCIES DESIGNED TO MEET UL, CSA, TUV STANDARDS, CONCENTRIC CONSTRUCTION
- 4 CONSTRUCTION:
- PRIMARY INPUT VOLTAGE (2+3) = 230 VAC, 50/60 HZ
PRIMARY INPUT VOLTAGE (1+3, 4+2) = 115 VAC, 50/60 HZ
PARALLEL CONNECTION (5+7, 6+8) = 60V @ 40 mA
SERIES CONNECTION (6+7) = 120V C.T. @ 20 mA
SECONDARY RMS RATING: -
VOLT-AMPERES RATING = 2.5 VA
- 3 SPECIFICATIONS @ 25°C
- WIRE: UL RECOGNIZED 130°C RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
- 2 CORE: 50 Hz / 60 Hz LAMINATION
- BOBBIN RATING CLASS B (130°C) REQUIRED
- 1 MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY

NOTES: UNLESS OTHERWISE SPECIFIED, READ NOTES FROM BOTTOM TO TOP

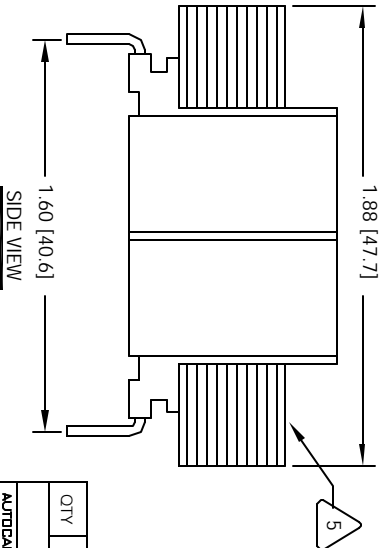

UNLESS OTHERWISE SPECIFIED DIMENSIONING AND TOLERANCES PER ANSI Y14.1M ALL DIMENSIONS ARE IN INCHES AND (PARENTHESES).

TOLERANCES UNLESS OTHERWISE SPECIFIED:

XXX=±.127 XX=±.030 X=±.010

ANGLE PRECEDENCE

DO NOT SCALE DRAWING

QTY	CODE IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
	AUTOCAD SOLIDWORKS	X		
	SIGN	DATE	TITLE	
	TKK	4/15/05	Power Transformer	
	JLAW	4/15/05	EPL Series, 2.5VA, 0.65" High	
	KSLUM	4/16/05		
	JLAW	4/15/05		
SIZE (INCHES)			SCALE	REV
B			2=1	A
SHEET 1			OF 1	

CWS Coil Winding Specialist

1510 E. Edinger Ave. Unit B, Santa Ana, CA 92705