
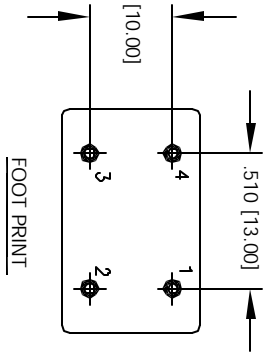
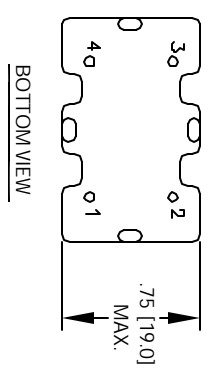
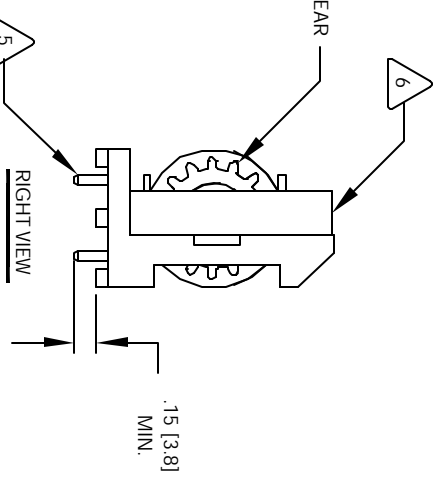
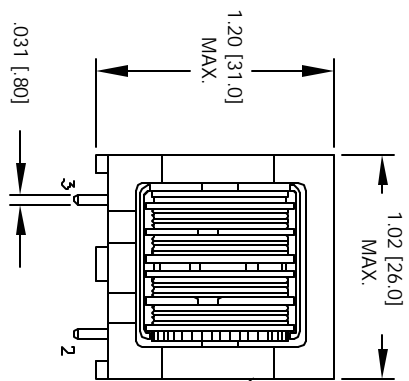


The information contained in this drawing is the sole property of CWS Coil Winding Specialist. Any reproduction in part or whole without written permission of CWS Coil Winding Specialist is prohibited.

REVISION HISTORY

REV	ECN	DESCRIPTION	DATE	BY	CHK
A		PRODUCTION RELEASE	9/03/04	JLU	9/03/04



6 WHERE SHOWN, USING A PERMANENT MARKING METHOD
MARK PART NUMBER AND REVISION APPROX

5 REMOVE INSULATION AND SOLDER TO BOBBIN LEADS

4 WIND BOTH COILS EVENLY SPACED ON BOBBIN
CONSTRUCTION:

INSURE INTEGRITY OF WINDING SEPARATION
HI-POT TEST FOR INTERWINDING ISOLATION, 1250VDC TO
WIRE SIZE DIAMETER = 0.70 MILLIMETER
NUMBER OF TURNS = 28
DCR = 0.06 MILLIOHMS MAX
CURRENT RATING = 3.0A AC
L = 1.50 mH MIN @ 10 KHz, 0.250 Vrms;
3 SPECIFICATIONS @ 25 °C

2 WIRE: UL RECOGNIZED 130° RATED MAGNET WIRE
CWS BYTEMARK OR OTHER APPROVED PART
CORE: SINGLE PIECE FERRITE H CORE

1 BOBBIN RATING CLASS B (130°) REQUIRED
MATERIAL: UL RECOGNIZED 94V-0 FOR FLAMMABILITY
NOTES: UNLESS OTHERWISE SPECIFIED.

QTY	UM	CODE	IDENT	MFG. P/N	DESCRIPTION	ITEM NO.
					PARTS LIST	
					COILS.COM, INC 1510 E. Edinger Ave Unit B, Santa Ana, CA 92705	
					Common Mode Line Filter Vertical Mount	
					SIZE: DIM. IN. 24V_1K5	REV A
					SCALE: 1=1	SHEET 1 OF 1